



SOLUTIONS IN SAFETY + LIGHTING


www.rp-group.com

Art.-Nr: DOE029

Emergency light Centralised power supply systems Ceiling mounting, CPS, , IP20, Polycarbonate, Transparent,

Small LED safety luminaire, for recessed and surface mounting, with great effect. The small dimensions and transparent housing material make completely unobtrusive mounting possible.

This variant is intended for installation in ceilings. The mounting plate/clips, as well as the emergency light technology in a housing with strain relief, are supplied.

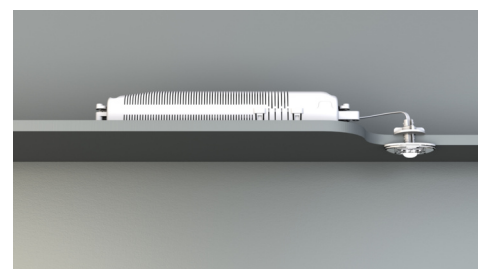

More information

www.rp-group.com/en/item/DOE029



Technical Data


Luminaire type	Emergency light
Mounting	Ceiling mounting
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Transparent
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC

Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230V
Input frequency	50 / 60 Hz
Input voltage DC	100-254V
Power max.	1,9W
Power maintained	1,9W
Power non-maintained	0W
Ambient temperature maintained mode	-25°C to 40°C
Ambient temperature non-maintained mode	-25°C to 40°C
Depth	24mm
Width	50mm
Height	12mm
Installation dimensions Diameter	10.5mm
Weight	0.07
Weight incl. packaging	0.15
Connection cross-section	1.5mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	140lm
Luminous flux emergency	140lm
Customs tariff number	94056120
GTIN	4260123683597

Technical drawing



Related Products

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires
DOE029ML		Central power supply (ML)	Central power supply	Transparent	€€€	Yes	low	Yes	1,920 per system

As of: 12.06.2026 - Subject to technical changes and errors.