



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: AMCT009ML-E

**Exit sign, Emergency light Centralised power supply systems
Ceiling mounting, CPS, 22 m, IP20, Zinc die-cast, Stainless steel,**

Modern zinc die-cast emergency exit sign/safety luminaire with wire suspension for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides. In the event of power failure, duo technology means that the escape and emergency routes are illuminated by an additional LED.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via [central power supply system](#). Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/
AMCT009ML-E](http://www.rp-group.com/en/item/AMCT009ML-E)





Technical Data

Luminaire type	Exit sign, Emergency light
Mounting	Ceiling mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast

Housing color	Stainless steel
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230V
Input frequency	50 / 60 Hz
Input voltage DC	216V
Power max.	4,2W
Power maintained	3,1W
Power non-maintained	1,1W
Ambient temperature maintained mode	-20°C to 40°C
Ambient temperature non-maintained mode	-20°C to 40°C
Depth	79mm
Width	236mm
Height	214mm
Installation length	176mm
Installation width	68mm
Installation height	40mm
Weight	1.46
Weight incl. packaging	1.82
Connection cross-section	2.5mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux emergency	100lm
EOF	N/A
Customs tariff number	94056180
GTIN	4260581713720

Technical drawing

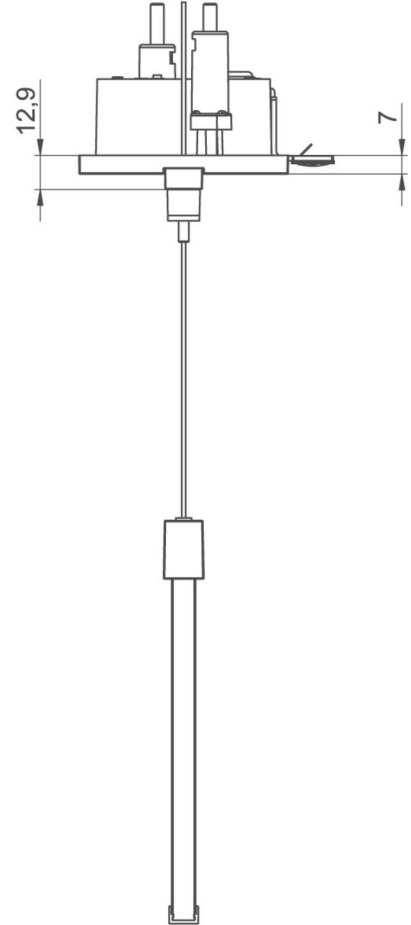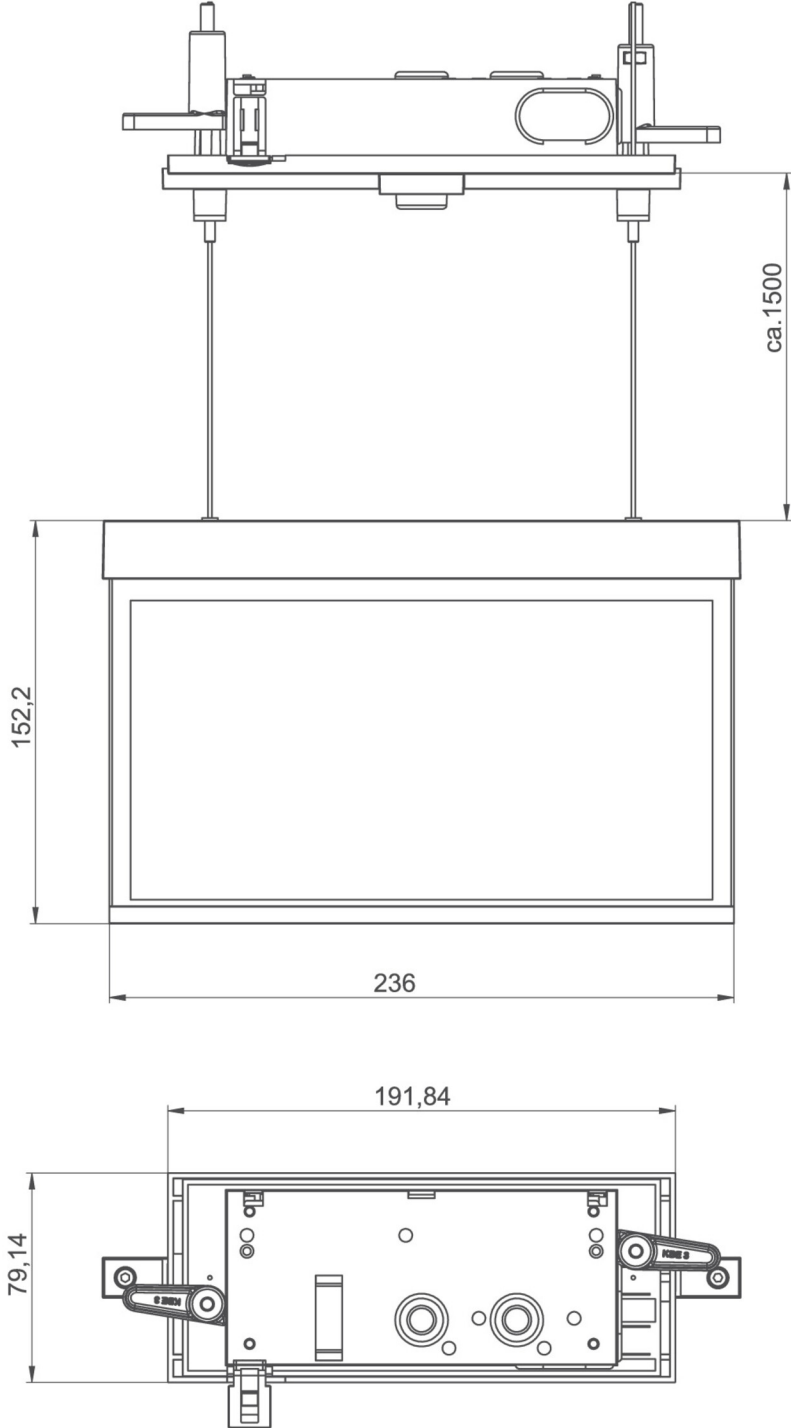

Accessory List

AM-XBE - Flush-mounted box

Related Products

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Sin lum mon
AMCT009ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	cen

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Sin lum mon
AMCT009ML-AZ		Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	cen

As of: 12.06.2026 - Subject to technical changes and errors.