




**Art.-Nr: YPAED-QENT-3801-U**  
**LED frame panel "EDGE"**  
**ceiling inlay luminaire, square,**

LED recessed luminaire, frame panel, EDGE series, for 625 mm ceiling module. Flat shape. Aluminium frame, white, powder-coated. Diffuser made from plastic (PMMA), opal, non-yellowing. Power supply, can be switched or dimmed (DALI/ TRIAC dimmer), external. Version with CASAMBI® Bluetooth control, RGBW and tunable white available.

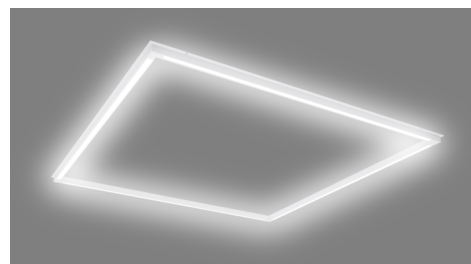

[More information](#)



## TECHNICAL DATA


| Dimensions                  |           |
|-----------------------------|-----------|
| Product dimensions Length   | 615 mm    |
| Product dimensions Width    | 615 mm    |
| Product dimensions Height   | 15 mm     |
| Product weight              | 0.46 kg   |
| Packaging dimensions        |           |
| Packaging dimensions Length | 640 mm    |
| Packaging dimensions Width  | 635 mm    |
| Packaging dimensions Height | 30 mm     |
| Weight incl. packaging      | 0.56 kg   |
| Color                       |           |
| Color                       | White     |
| Housing material            |           |
| Housing material            | Aluminium |
| Certification               |           |
| Certification               | CE, RoHS  |
| Insulation class            | 2         |
| Protection type (IP)        | IP20      |
| Protection type (IP)        | IP40      |
| Electrical connection       |           |
| Type of dimming             | TRIAC     |
| System performance          | 40 W      |



|                           |                                      |
|---------------------------|--------------------------------------|
| Input voltage AC          | 220-240V / 50-60Hz V                 |
| Power factor              | 90 PF                                |
| power supply              |                                      |
| Electrical design         | with external control gear, Dimmable |
| Light data                |                                      |
| Light source              | LED                                  |
| Rated luminous flux       | 2600 lm                              |
| Colour rendering index    | > 80 Ra                              |
| Beam angle                | 92/90 °                              |
| Color temperature         | 4000 K                               |
| Light color               | 840                                  |
| UGR                       | 16.6                                 |
| Temperatures              |                                      |
| Ambient temperature (Min) | -20 °C                               |
| Ambient temperature (Max) | +40 °C                               |
| Mounting                  |                                      |
| Mounting                  | Ceiling mounting                     |



TEXT.LICHTVERTEILUNG

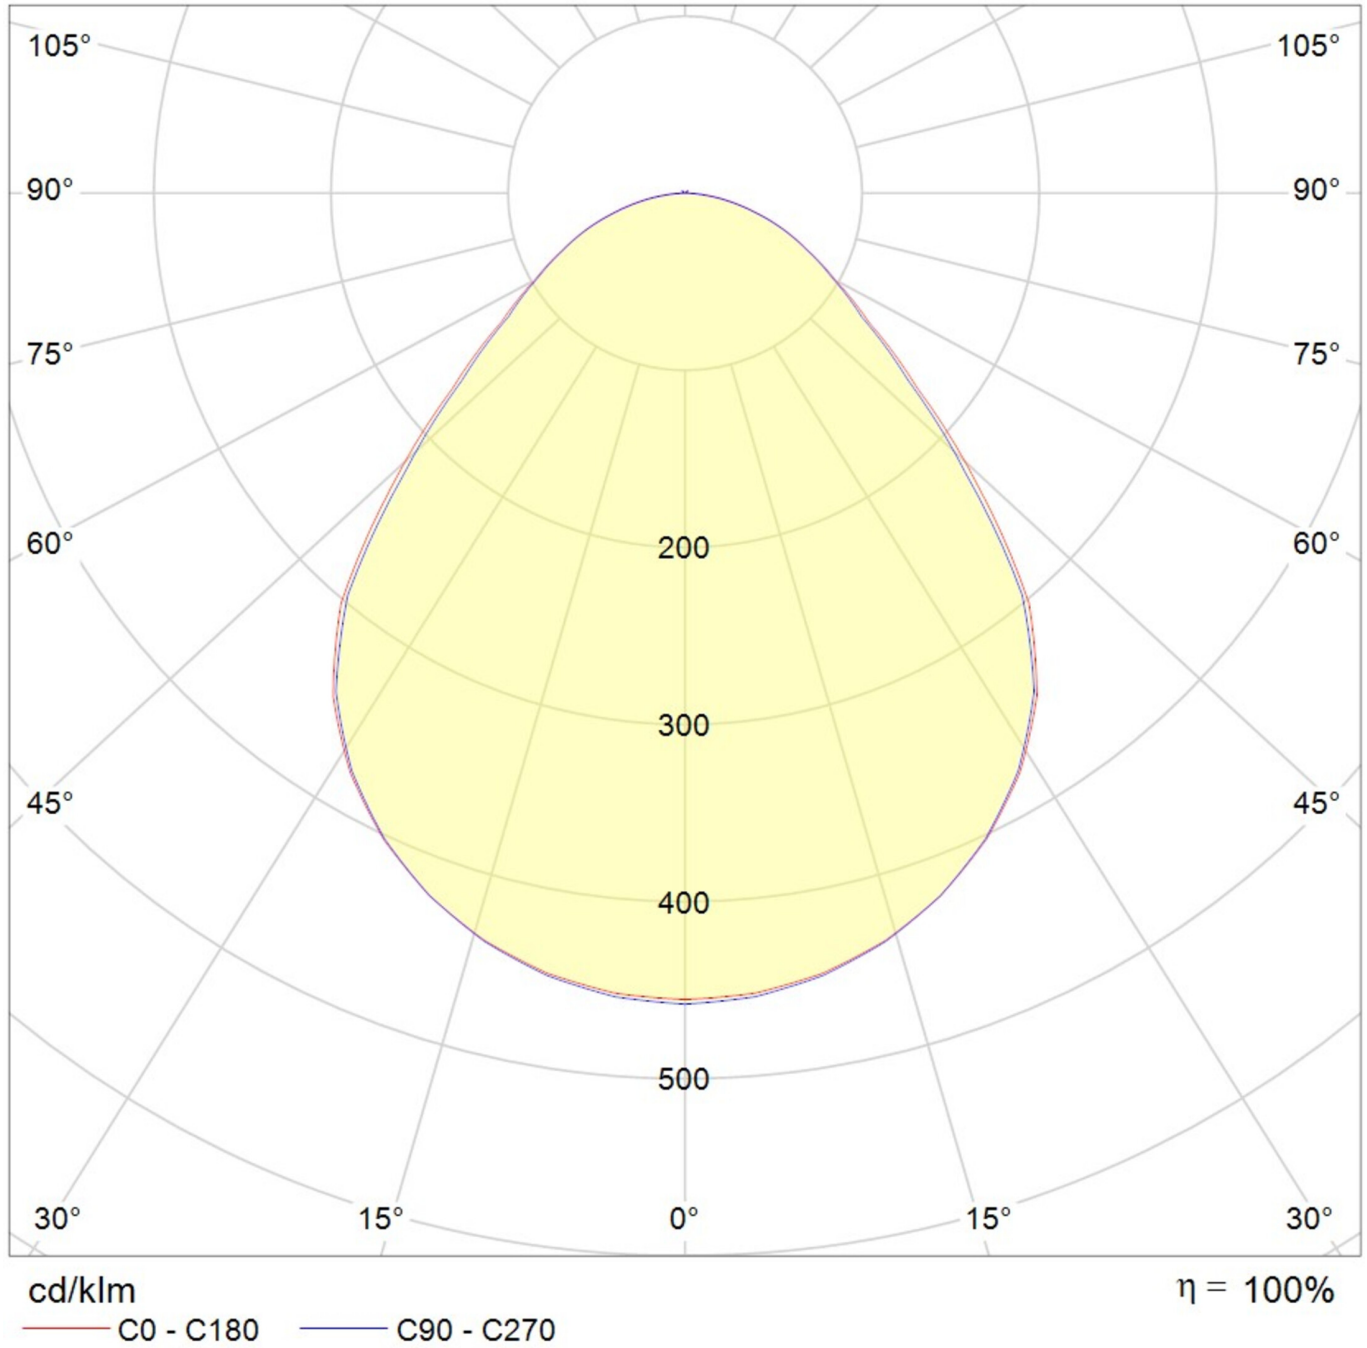

stand: 21.06.2024 - Subject to technical changes and errors.