



Art.-Nr: QBW029ML-BM

**General light, Safety luminaire Central power supply
Universal, ML, Central power supply, , IP44, Plastic, white**

Round plastic luminaire for general lighting with integrated motion detector. As well as illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Robust and timeless design, suitable for indoor use. The emergency light LED can be unfolded tool-free during assembly e.g. for optimally illumination of the escape and rescue routes especially for wall mounting. The general light is switched independently of the emergency light via the motion detector, which is not visible from the outside.



[More information](#)



TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP44
Impact resistance (IK)	6
Certification	Waste disposal, CE
Insulation class	2
Supply	Central power supply
Monitoring	ML
Bridging time	Central power supply
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	19,5 W
Power DS	17,5 W
Power BS	1,6 W





Height	98 mm
Diameter	339 mm
Weight	1.47
Weight incl. packaging	1.69
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	1800 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260682146205





TECHNICAL DRAWING

QBW

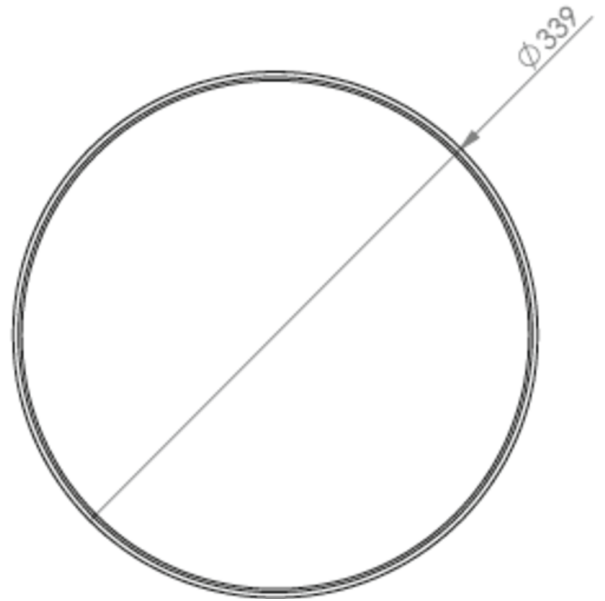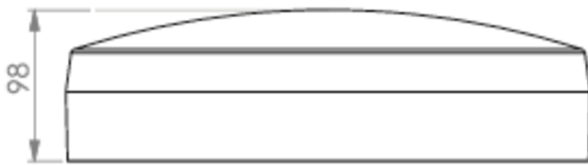

QBW

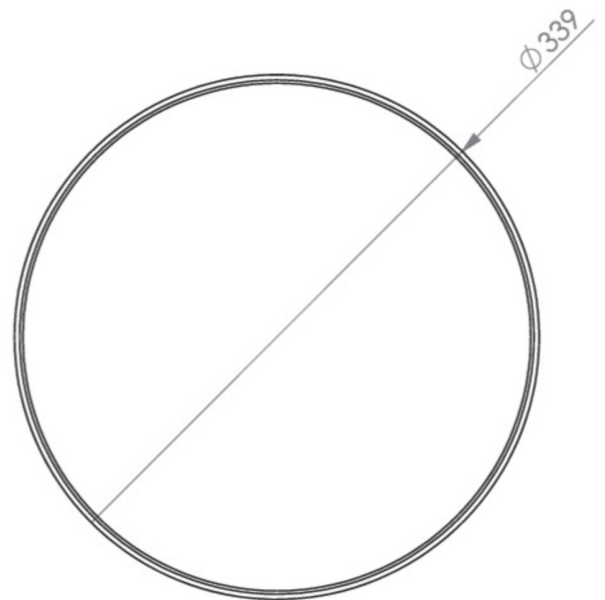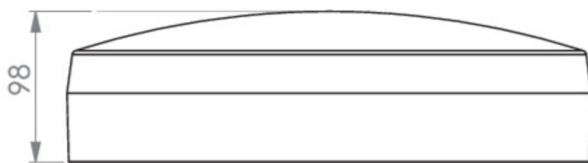



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
QBW029ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 05.07.2024 - Subject to technical changes and errors.