



SOLUTIONS IN SAFETY + LIGHTING


www.rp-group.com

Art.-Nr: DDE039

Emergency light Centralised power supply systems Ceiling mounting, CPS, , IP40, Zinc die-cast, White,

Powerful LED safety luminaire for recessed mounting in the ceiling. Both the spotlight and cooling element are made from high-grade zinc die-cast.

The structure, as well as the material used, ensure good heat dissipation and a long LED life. The compact design permits mounting in a 68mm opening in the ceiling. It is secured with ease using tension springs.

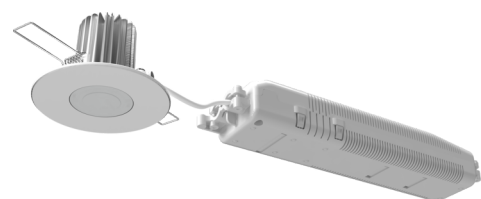

More information

[www.rp-group.com/en/item/
DDE039](http://www.rp-group.com/en/item/DDE039)






Technical Data

Luminaire type	Emergency light
Mounting	Ceiling mounting
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	8
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems

Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230V
Input frequency	50 / 60 Hz
Input voltage DC	100-254V
Power max.	7,1W
Power maintained	7,1W
Power non-maintained	0W
Ambient temperature maintained mode	-10°C to 50°C
Ambient temperature non-maintained mode	-10°C to 50°C
Height	58mm
Diameter	88mm
Installation height	110mm
Installation dimensions Diameter	68mm
Weight	0.37
Weight incl. packaging	0.5
Connection cross-section	1.5mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	825lm
Luminous flux emergency	825lm
Customs tariff number	94056180
GTIN	4260682152534

Technical drawing

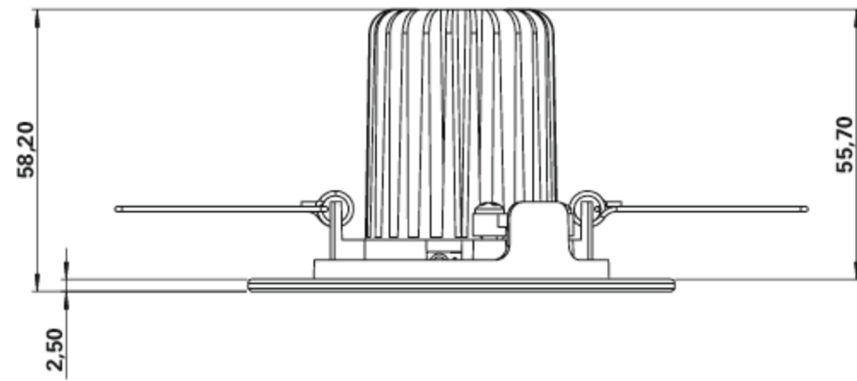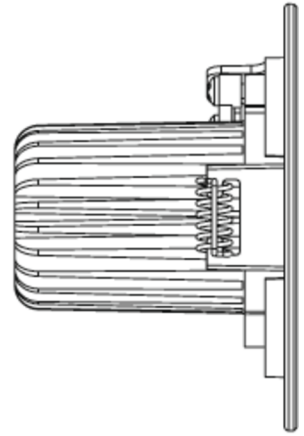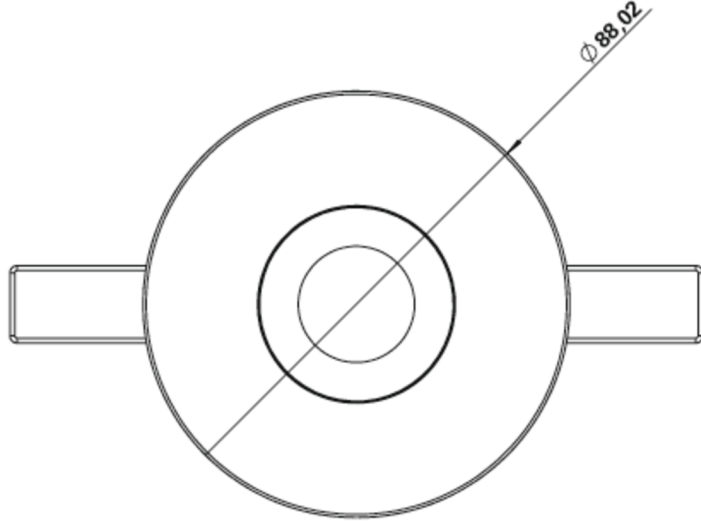

Accessory List

BALLPLX-ILE - Wire mesh surround
 As of: 12.06.2026 - Subject to technical changes and errors.