



**Art.-Nr: PMD509CC**

**Exit sign**

**Ceiling, CoreCompact 24, , 20 m, IP65, Plastic, white**

Polycarbonate LED exit sign with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces. Planning safety is ensured by tool-free, variable use of the pictograms on site. The pictograms are internal and are inserted solvent-free. The pictogram set (MTL, MTR and 2x arrow straight) is included as standard.

In accordance to EN 60598-1, EN 60598-2-22, EN ISO 7010 and DIN EN 1838.



More information




## TECHNICAL DATA

|                        |                  |
|------------------------|------------------|
| Luminaire type         | Exit sign        |
| Mounting               | Ceiling          |
| Recognition distance   | 20 m             |
| Pictograph             | Set              |
| Housing material       | Plastic          |
| Housing color          | white            |
| Protection type (IP)   | IP65             |
| Impact resistance (IK) | ≥ 3              |
| Certification          | WEEE, CE, D-Sign |
| Insulation class       | 2                |
| Monitoring             | CoreCompact 24   |
| Depth                  | 168 mm           |
| Width                  | 236 mm           |
| Height                 | 136 mm           |
| Weight                 | 0.8              |
| Weight incl. packaging | 0.9              |
| Customs tariff number  | 94056120         |
| Country of origin      | DEUTSCHLAND      |
| EAN                    | 4260766552021    |



## TECHNICAL DRAWING

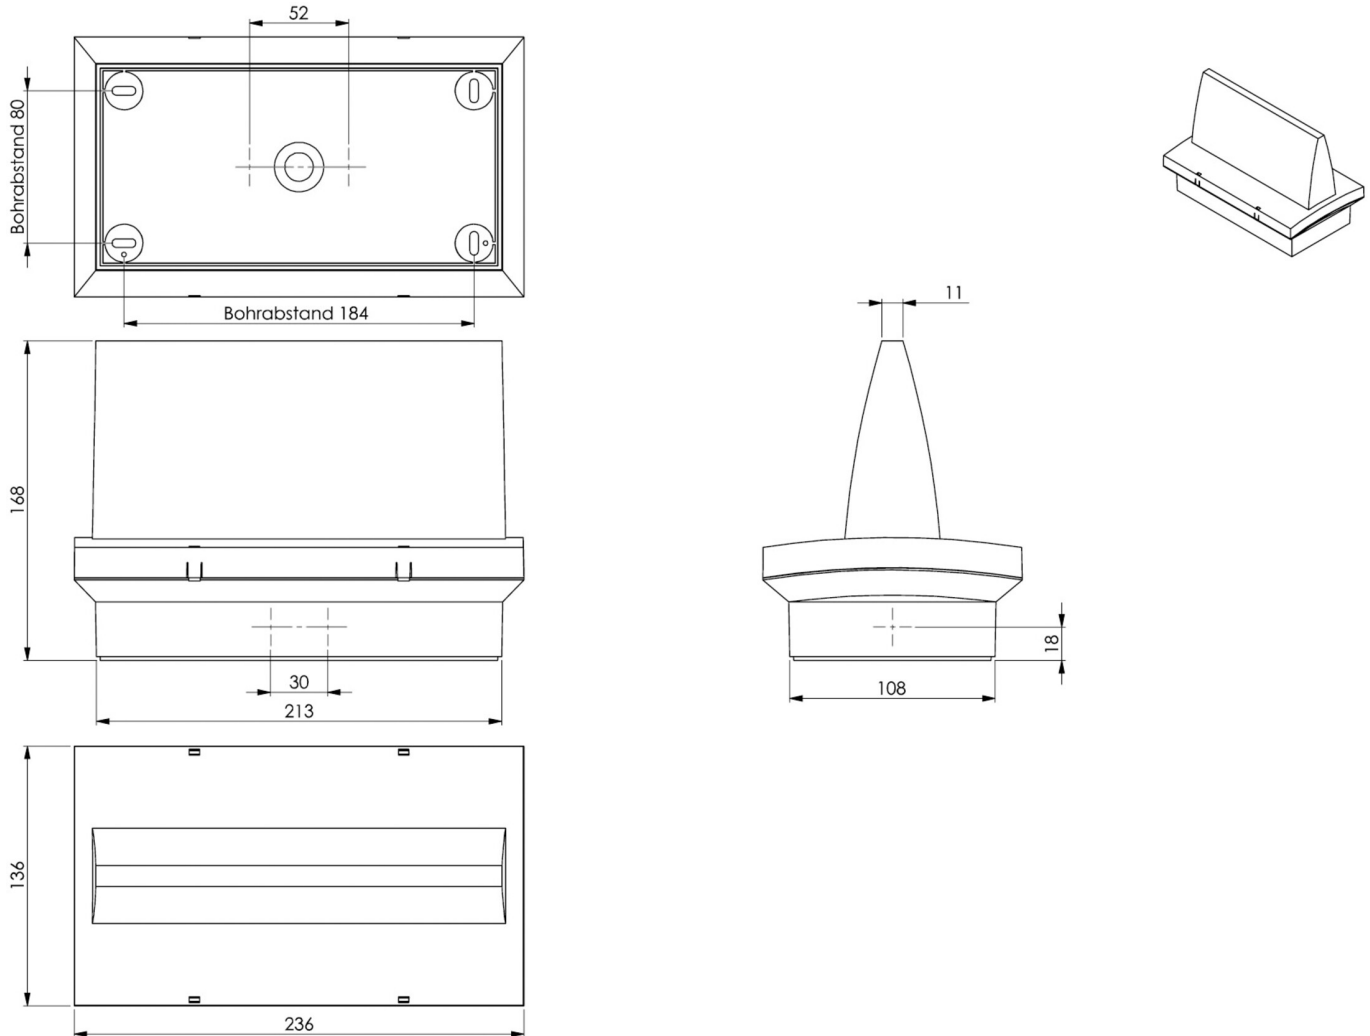

As of: 08.07.2024 - Subject to technical changes and errors.