



Art.-Nr: NVKS451WLSE Self-contained supply

Self-contained battery supply with output voltage 230V/AC square voltage, 2 wire system up to 500m distance. for supply of 1 or 2 luminaires with fluorescent lamps, light bulbs or LED illuminants at 100% luminous flux.

Technical specifications according to DIN - VDA 0108-100 and DIN EN 60598 - 2 - 22. With deep discharge protection and integrated switch - on lock, threshold switch. The supply is handled by a maintenance-free, long life and gas-proof Pb rechargeable battery. The fully electronic and time controlled charging ensures an extended battery life. The LED function and monitoring display shows operating states and faults. A manual activation of a function test is possible through the built-in test button.



[More information](#)




TECHNICAL DATA

Inserts	- pcs.
Number of circuits	2
Loader	Yes
Modules SAM	No
IO modules	No
CCIF	No
Connectable	No
Outgoing UPS	No
Battery compartment	Yes
Input voltageAC	230 V V
Input frequency	50 / 60 Hz
Output voltage AC	230V (rect.) V
Material	Steel sheet
Housing color	RAL 7035
Insulation class	IP54
Insulation class	IP54
Weight	kg
Customs tariff number	85389091
Country of origin	DEUTSCHLAND



TRANS.MASSZEICHNUNG

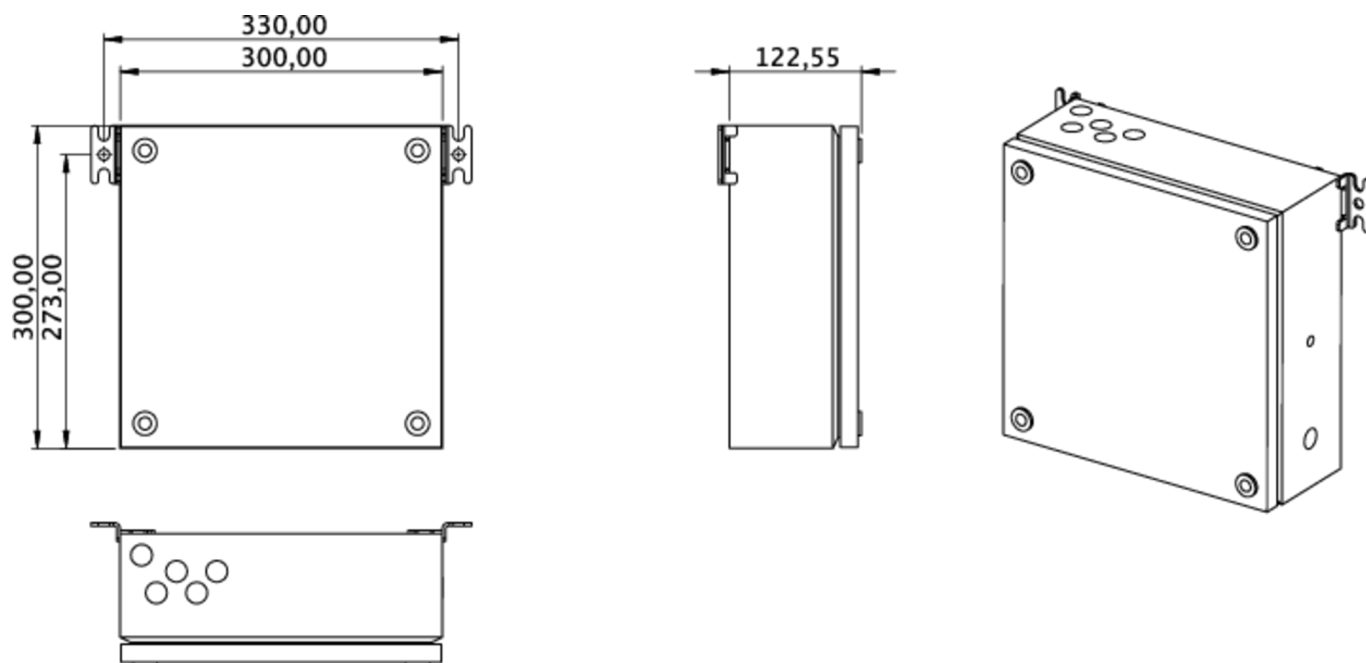

As of: 02.07.2024 - Subject to technical changes and errors.