



Art.-Nr: KWIW423SC
Safety luminaire
Universal, SelfControl (SC), 3 h , IP65, Plastic, white

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information
www.rp-group.com/en/item/KWIW423SC




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 6,4 V/3,3Ah Ah
Power max.	7,3 W
Power DS	5,9 W
Power BS	0,9 W
Ambient temperature DS	-5 °C to 40 °C
Ambient temperature BS	-5 °C to 40 °C
Depth	86 mm
Width	390 mm
Height	99 mm
Weight	0.83
Weight incl. packaging	0.93



Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
EAN	4260766553615

TECHNICAL DRAWING

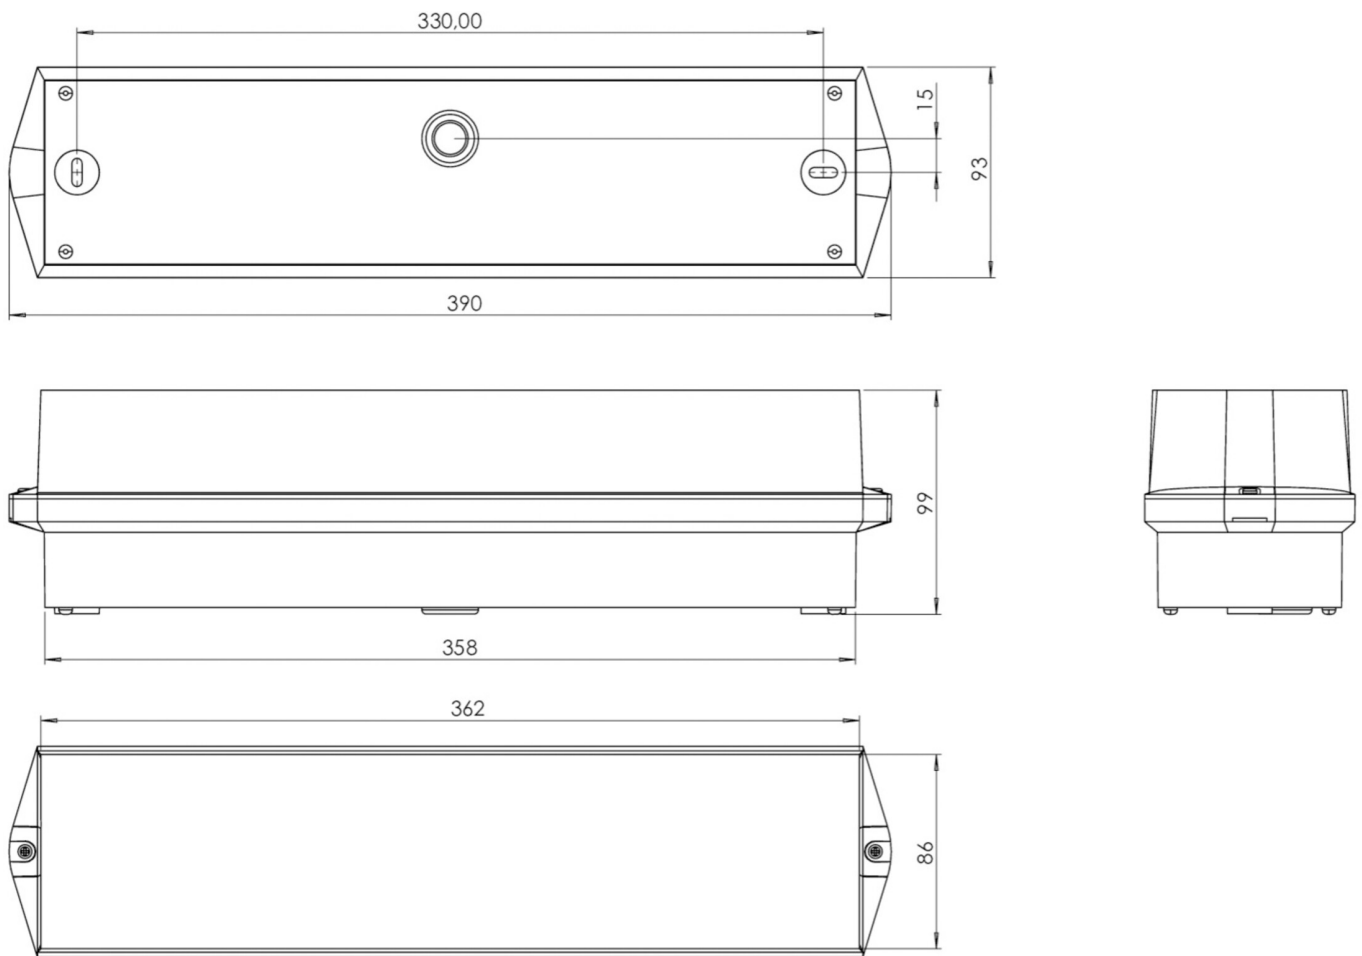

ACCESSORY LIST

BKW -

As of: 18.06.2025 - Subject to technical changes and errors.