



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: WKW411SC


Exit sign Self-contained

Wall mounting, 1 h, 36 m, IP20, Metal, White,

Square emergency exit sign cube luminaire for wall mounting for illuminating escape and emergency routes.

The cube shape means that this plastic luminaire is easily recognisable from three sides. Ideal for large-scale applications, e.g. in large stores.

Automatic monitoring of safety luminaire with [SelfControl](#). Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

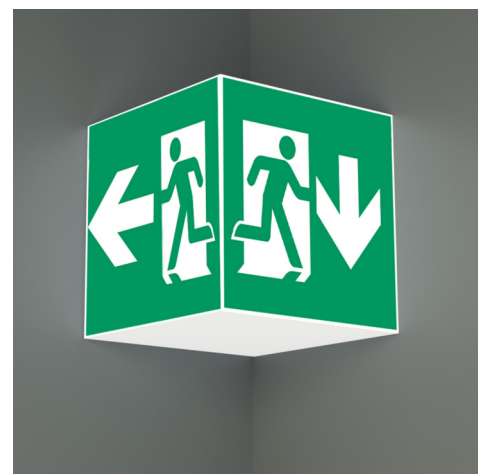

More information

www.rp-group.com/en/item/WKW411SC




Technical Data


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	36 m
Pictograph	Set

Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2V/1,6Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180V - 250V
Input frequency	50 Hz
Power max.	6,4W
Power maintained	5,6W
Power non-maintained	2W
Ambient temperature maintained mode	-5°C to 40°C
Ambient temperature non-maintained mode	-5°C to 40°C
Depth	195mm
Width	195mm
Height	195mm
Weight	0.84
Weight incl. packaging	0.98
Connection cross-section	2,5mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	470lm
Luminous flux emergency	470lm
Customs tariff number	94056180
GTIN	4260766556890


Technical drawing

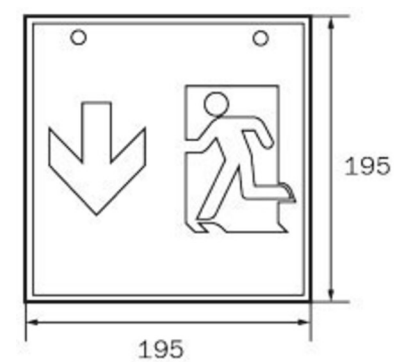


WG

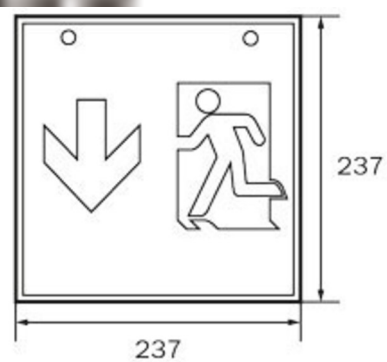

WK

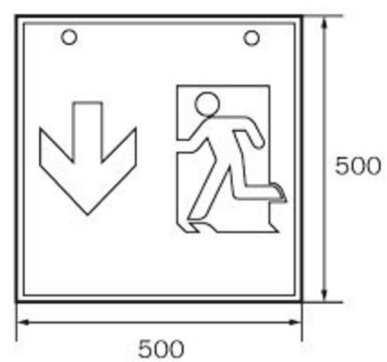


WX

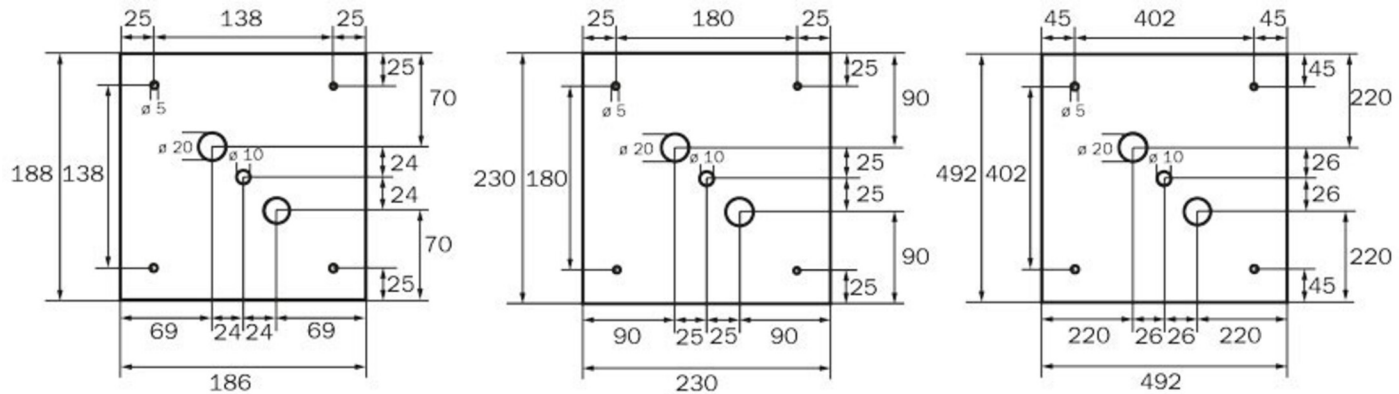

WG

WK

WX

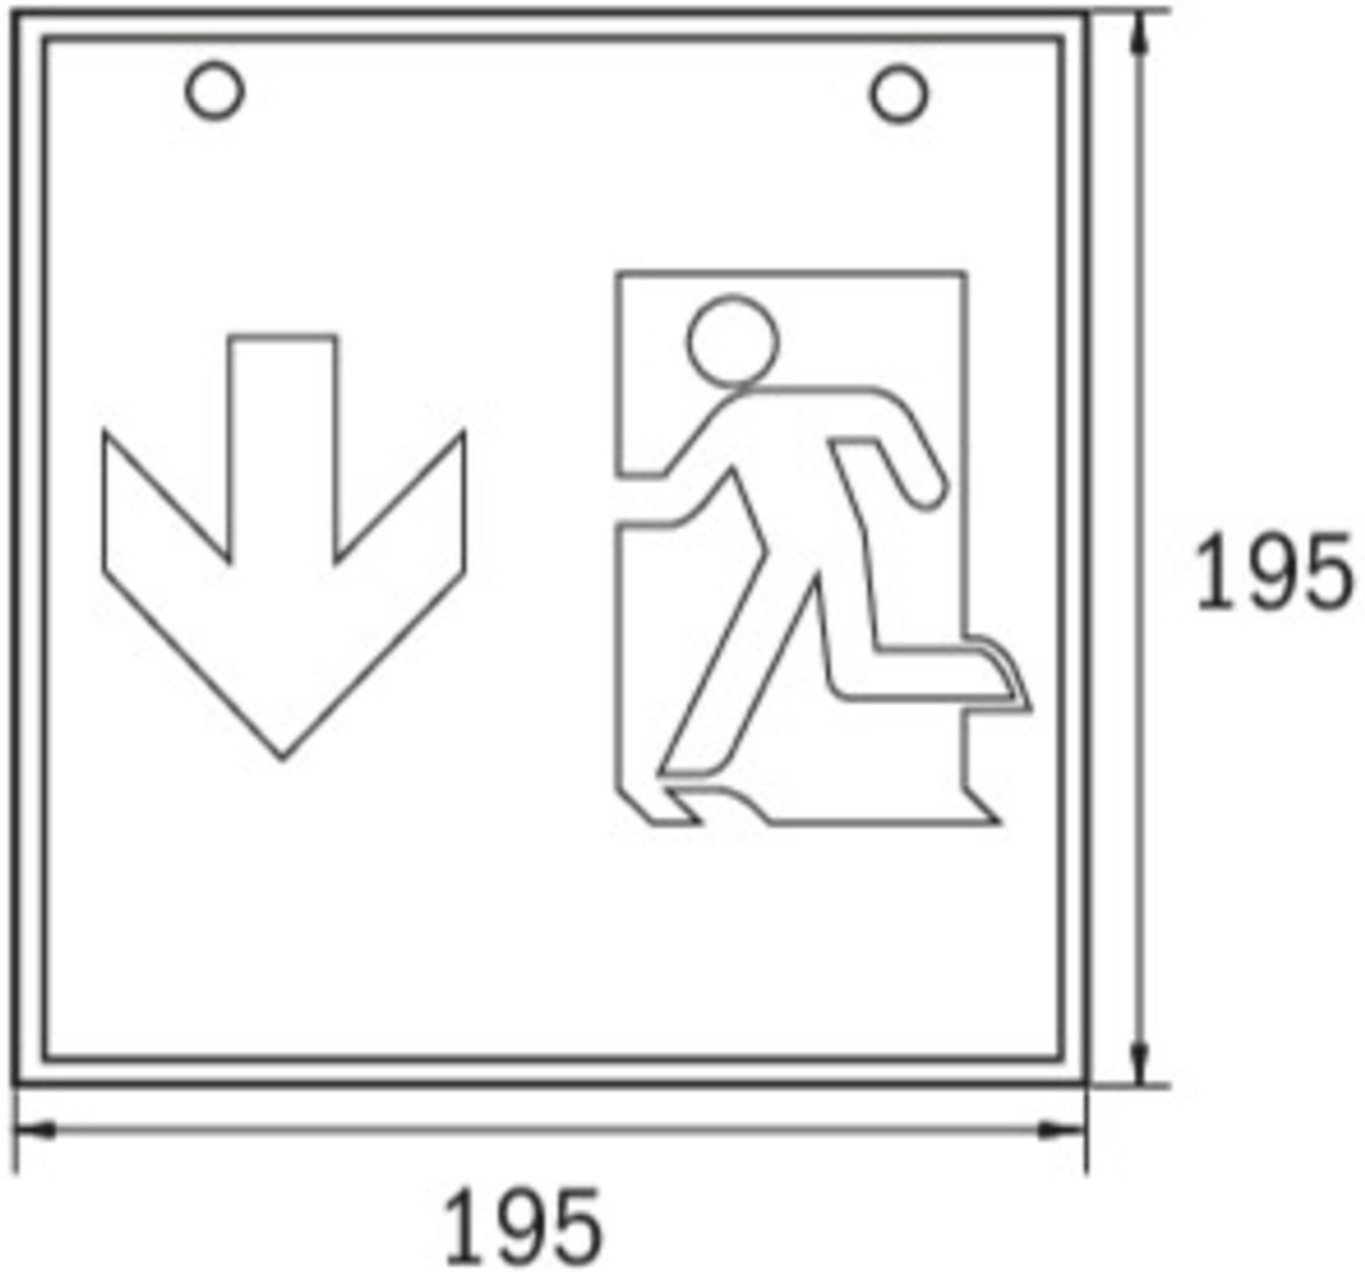

Accessory List

LFP3216-SET-2AKKU - LiFePO4 Battery
 As of: 23.06.2026 - Subject to technical changes and errors.