



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: WGD411SC

Exit sign Self-contained

Surface mounting, 1 h, 46 m, IP20, Metal, White,

Square emergency exit sign cube luminaire for identifying escape and emergency routes. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Automatic monitoring of safety luminaire with **SelfControl**. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).



More information

www.rp-group.com/en/item/WGD411SC







Technical Data

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	46 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20


Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2V/1,6Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180V - 250V
Input frequency	50 Hz
Power max.	6,4W
Power maintained	5,6W
Power non-maintained	2W
Ambient temperature maintained mode	-5°C to 40°C
Ambient temperature non-maintained mode	-5°C to 40°C
Depth	237mm
Width	237mm
Height	237mm
Weight	1.23
Weight incl. packaging	1.37
Connection cross-section	2,5mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	470lm
Luminous flux emergency	470lm
Customs tariff number	94056120
GTIN	4260766556807

Technical drawing

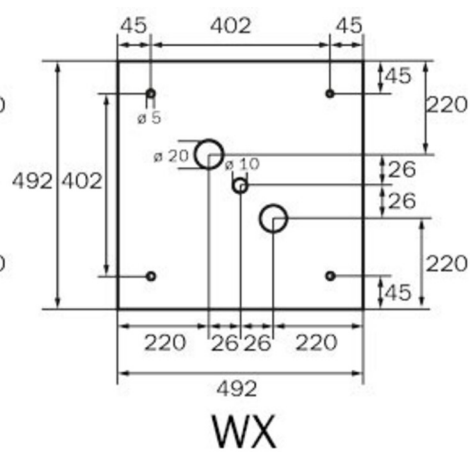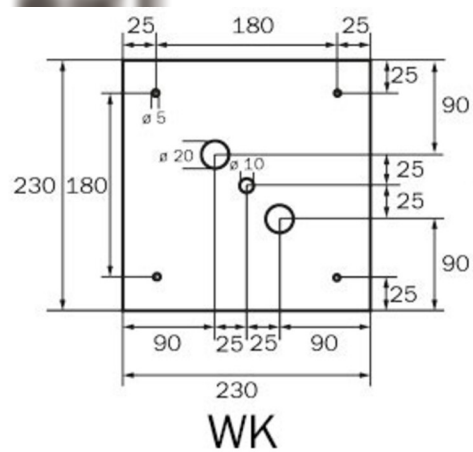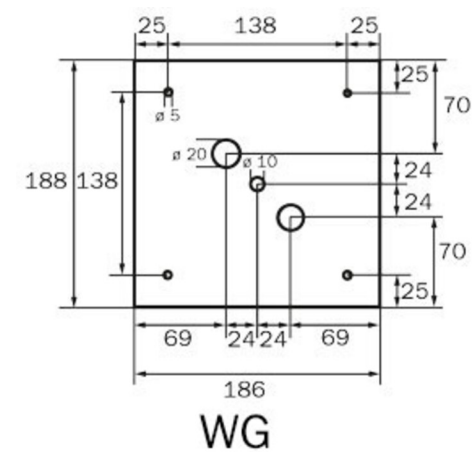


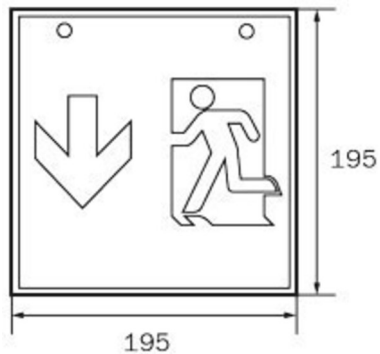


WG

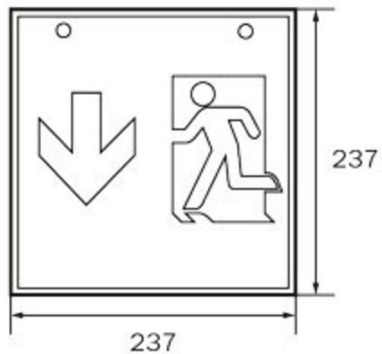

WK

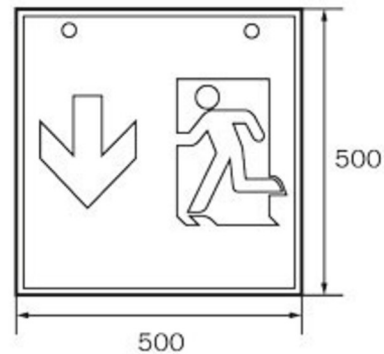

WX

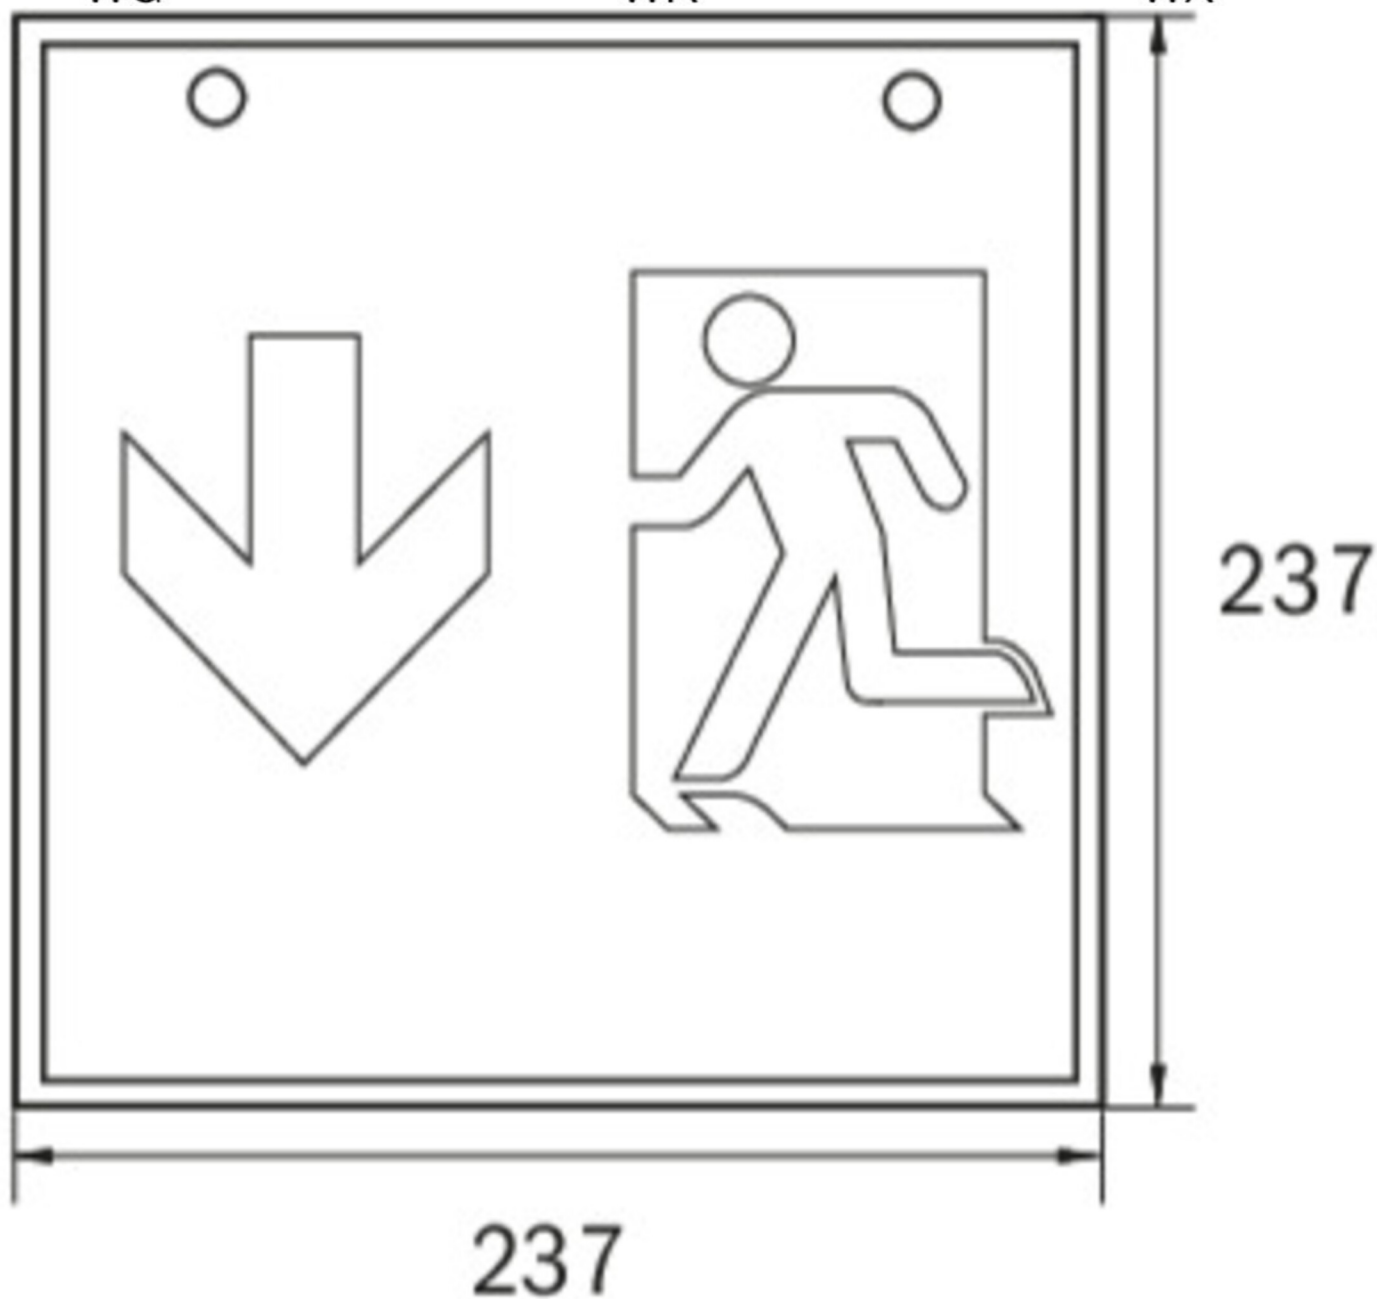

Accessory List

LFP3216-SET-2AKKU - LiFePO4 Battery

As of: 23.06.2026 - Subject to technical changes and errors.