



Art.-Nr: PMW403WL-TT

Exit sign

Wall, Wireless Professional, , 20 m, IP65, Plastic, white

Polycarbonate LED exit sign with convex shaped hood for ceiling or wall mounting. Suitable for continuous or standby mode. For ease of installation, levelling screws are integrated to compensate for uneven surfaces. Planning safety is ensured by tool-free, variable use of the pictograms on site. The pictograms are internal and are inserted solvent-free. The pictogram set (MTL, MTR and 2x arrow straight) is included as standard.

In accordance to EN 60598-1, EN 60598-2-22, EN ISO 7010 and DIN EN 1838.



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall
Recognition distance	20 m
Pictograph	Set
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	2
Monitoring	Wireless Professional
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.6
Weight incl. packaging	0.73
Customs tariff number	94056180
Country of origin	DEUTSCHLAND
EAN	4260766557774



TECHNICAL DRAWING

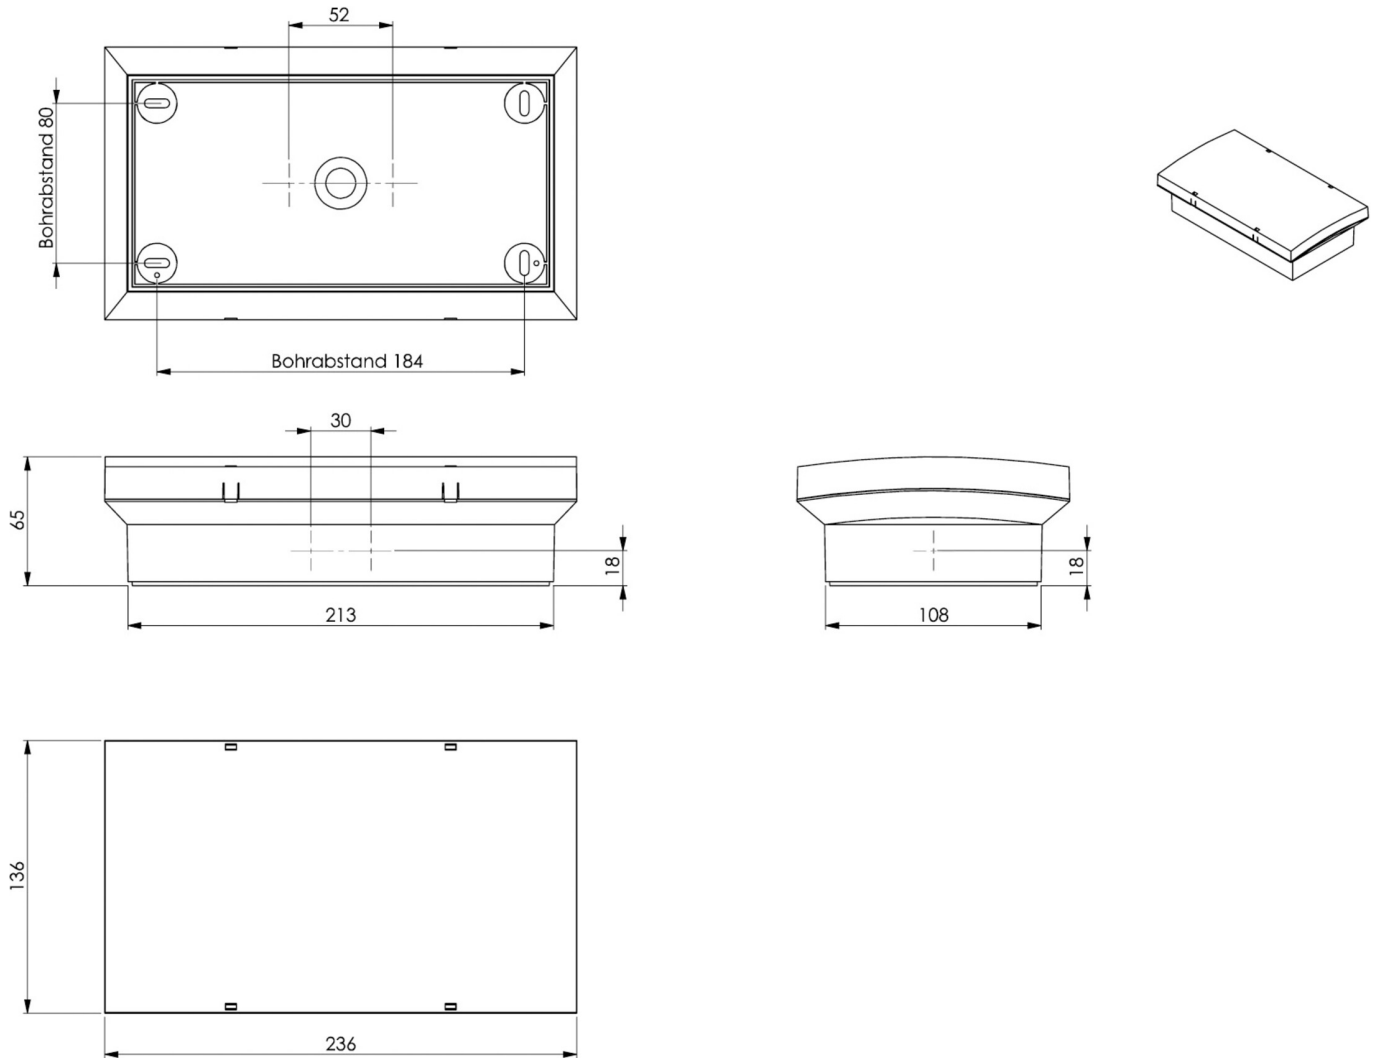

As of: 08.07.2024 - Subject to technical changes and errors.