



**Art.-Nr: ASMU411WB**  
**Exit sign Single Battery**  
**Universal, Wireless Basic, 1 h, 22 m, IP40, Aluminium,**  
**Anodised aluminium**

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



[More information](#)




## TECHNICAL DATA

|                        |                                                       |
|------------------------|-------------------------------------------------------|
| Luminaire type         | Exit sign                                             |
| Mounting               | Universal                                             |
| Recognition distance   | 22 m                                                  |
| Pictograph             | Set                                                   |
| Illuminant             | LED                                                   |
| Housing material       | Aluminium                                             |
| Housing color          | Anodised aluminium                                    |
| Protection type (IP)   | IP40                                                  |
| Impact resistance (IK) | 3                                                     |
| Certification          | Waste disposal, CE, ENEC, TÜV Rheinland Type approved |
| Insulation class       | 1                                                     |
| Supply                 | Single Battery                                        |
| Monitoring             | Wireless Basic                                        |
| Bridging time          | 1 h                                                   |
| Operating mode         | Standby circuit / permanent circuit                   |
| Input voltage AC       | 230 V                                                 |
| Input frequency        | 50 / 60 Hz                                            |
| Input voltage DC       | - V                                                   |
| Power max.             | 5,3 W                                                 |
| Power DS               | 3,9 W                                                 |
| Power BS               | 1,5 W                                                 |



|                          |                     |
|--------------------------|---------------------|
| Depth                    | 54 mm               |
| Width                    | 277 mm              |
| Height                   | 184 mm              |
| Weight                   | 0.81                |
| Weight incl. packaging   | 0.98                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | Connector           |
| Dimming function         | No                  |
| Luminous flux mains      | 190 lm              |
| Luminous flux emergency  | 190 lm              |
| Customs tariff number    | 94056180            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4260766559884       |

## TECHNICAL DRAWING

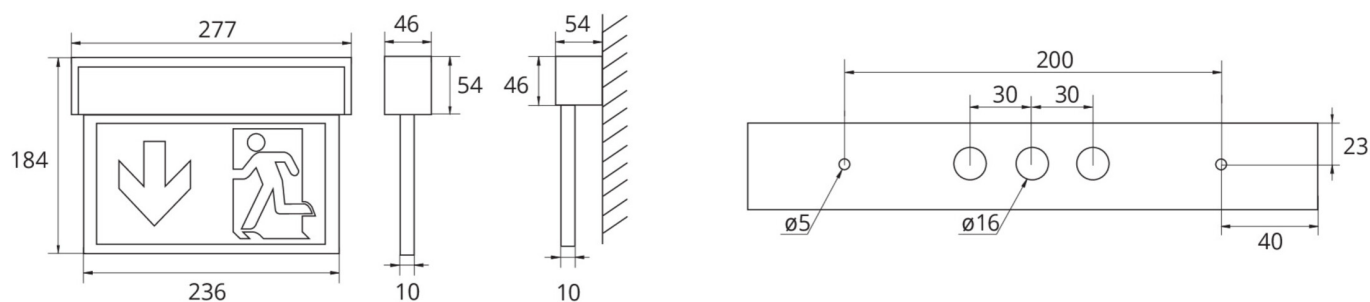

## ACCESSORY LIST

DSA -  
2PS-EB -

As of: 29.06.2024 - Subject to technical changes and errors.