



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: ASMU413SC Exit sign Self-contained Universal, 3 h, 22 m, IP40, Aluminium, Anodised aluminium,

Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Automatic monitoring of safety luminaire with [SelfControl](#). Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/ASMU413SC




Technical Data

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	3

Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2V/1,6Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230V
Input frequency	50 / 60 Hz
Input voltage DC	-V
Power max.	4,6W
Power maintained	3,3W
Power non-maintained	1W
Ambient temperature maintained mode	-5°C to 40°C
Ambient temperature non-maintained mode	-5°C to 40°C
Depth	54mm
Width	277mm
Height	184mm
Weight	0.86
Weight incl. packaging	1.03
Connection cross-section	2.5mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190lm
Luminous flux emergency	95lm
Customs tariff number	94056180
GTIN	4262483020593

Technical drawing

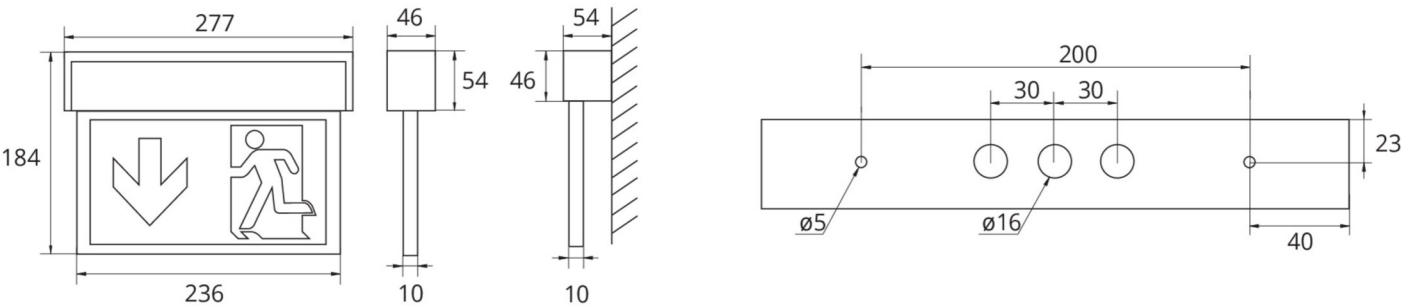

Accessory List

- DSA - Wire suspension
 - 2PS-EB - Pendant
 - BALLPLX-KMU.01 -
- As of: 16.06.2026 - Subject to technical changes and errors.