



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: QCW529CC

**General light, Emergency light Centralised power supply systems
Universal, CPS, , IP54, Zinc die-cast, White,**

Round zinc die-cast LED luminaire, as combined safety luminaire in a timeless design.

Alongside the general-purpose lighting, it also includes an integrated safety light function. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example.

Control and monitoring via central [24 V low-power system.](#)



More information

[www.rp-group.com/en/item/
QCW529CC](http://www.rp-group.com/en/item/QCW529CC)



Technical Data

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	White
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1



Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24V
Power max.	19W
Power maintained	17W
Power non-maintained	0,4W
Ambient temperature maintained mode	-5°C to 40°C
Ambient temperature non-maintained mode	-5°C to 40°C
Height	106mm
Diameter	363mm
Weight	2.5
Weight incl. packaging	2.83
Connection cross-section	2.5mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	1600lm
Luminous flux emergency	470lm
EOF	0.29
Customs tariff number	94056180
GTIN	4262483023648

Technical drawing

QCW

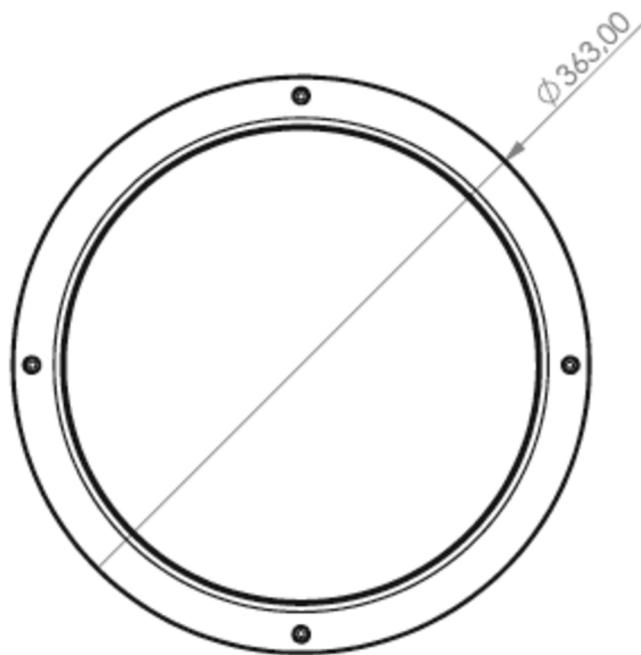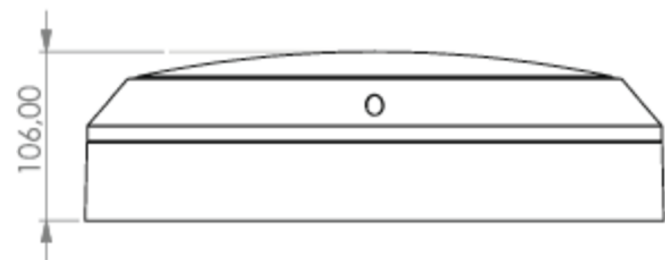

QCW

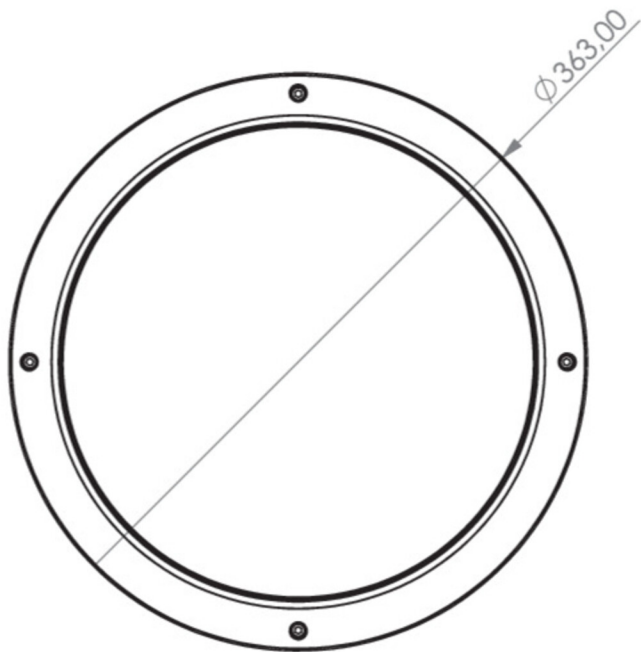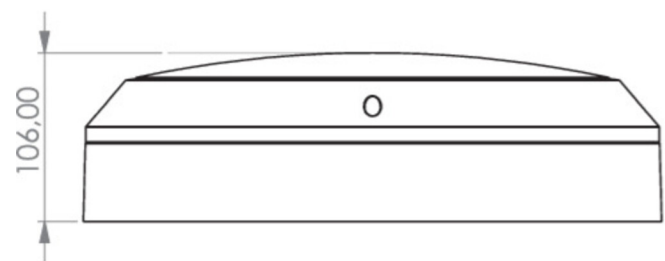

As of: 23.06.2026 - Subject to technical changes and errors.