



Art.-Nr: AGCC403WL-E
Exit sign Single Battery
Ceiling mounting, Wireless Professional, 3 h, 50m, IP20, Zinc die-cast, Stainless steel

The AGCC is a zinc-diecast exit sign with cord suspension for recessed ceiling mounting for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaire of the A-Series are of course equipped with modern LED illuminants and offer the flexibility of changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information



TECHNICAL DATA


| | |
|------------------------|---|
| Luminaire type | Exit sign |
| Mounting | Ceiling mounting |
| Recognition distance | 50m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | Wireless Professional |
| Bridging time | 3 h |
| Battery | LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 230 V |
| Input frequency | 50 Hz |
| Power max. | 7 W |
| Power DS | 5,6 W |



| | |
|--|---------------------|
| Power BS | 0,8 W |
| ~pim_attribute~zulaessigeUmgebungstemperaturInDS | -5 °C - 40 °C |
| ~pim_attribute~zulaessigeUmgebungstemperaturInBS | -5 °C - 40 °C |
| Depth | 79 mm |
| Width | 512 mm |
| Height | 309 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 2.62 |
| Weight incl. packaging | 3.27 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260682155238 |



TECHNICAL DRAWING

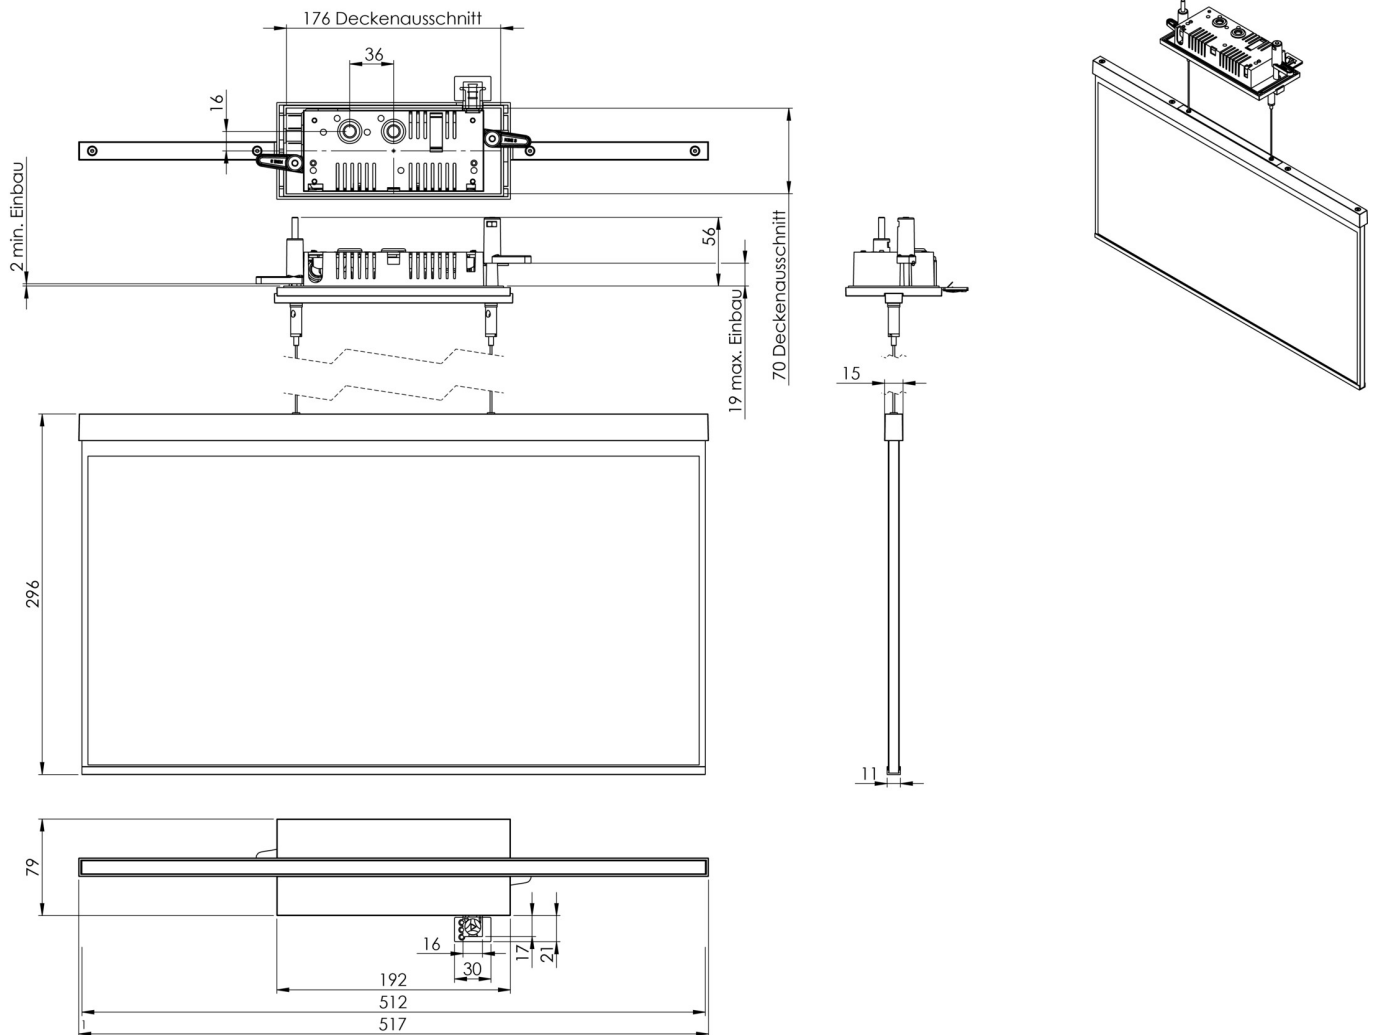

As of: 09.07.2024 - Subject to technical changes and errors.