



Art.-Nr: AIR509CC-AZ

Exit sign Centralised power supply systems

Recessed wall mounting, CoreCompact 24, CPS, 15 m, IP40, Zinc die-cast, Anthracite

The AIR is a zinc-diecast exit sign with recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information







TECHNICAL DATA

| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Recessed wall mounting |
| Recognition distance | 15 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 |
| Bridging time | CPS |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 24 V |
| Power max. | 1,7 W |
| Power DS | 1,7 W |
| Power BS | 0,4 W |
| Ambient temperature DS | -5 °C - 40 °C |



| | |
|----------------------------------|---------------------|
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 58 mm |
| Width | 167 mm |
| Height | 118 mm |
| Installation dimensions Diameter | 68 mm |
| Weight | 0.9 |
| Weight incl. packaging | 1.15 |
| Connection cross-section | 2.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260682156136 |

TECHNICAL DRAWING

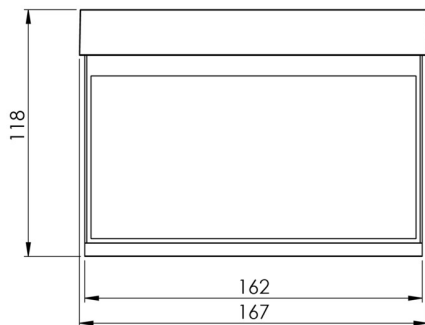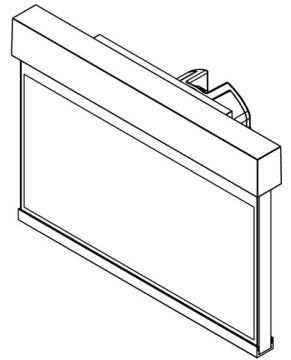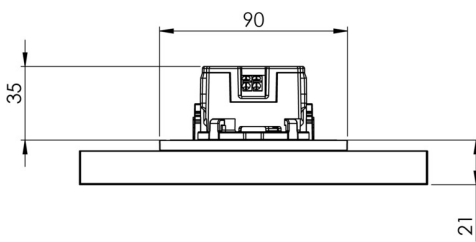



RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-------------|---|----------------|----------------------|-------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AIR009ML |  | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AIR009ML-AZ |  | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AIR009ML-E |  | ML | Central power supply | | €€€ | Yes | low | Yes | 1,920 per system | central |
| AIR509CC |  | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |
| AIR509CC-E |  | CoreCompact 24 | Central power supply | | €€ | Yes | low | Yes | | central |

As of: 10.07.2024 - Subject to technical changes and errors.