



Art.-Nr: ASMU019ML
Utgangsskilt lys sentral strømforsyning
Universell, ML, sentral strømforsyning, 22 m, IP40,
aluminium, Anodisert aluminium

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



Mer informasjon




TEKNISKE DATA

Type armatur	Utgangsskilt lys
Monteringstype	Universell
Deteksjonsområde	22 m
piktogram	sett
Lyspærer	LED
Koffertmateriale	aluminium
Farge på huset	Anodisert aluminium
IP-beskyttelse)	IP40
Slagstyrke (IK)	3
Sertifisering	Sjøpeltømming, CE, TÜV Rheinland designtestet, ENEC
beskyttelses klasse	1
omsorg	sentral strømforsyning
overvåkning	ML
Brotid	sentral strømforsyning
Driftsmodus	Individuell lysveksling
Inngangsspenning AC	230 V
Inngangsfrekvens	50/60 Hz
Inngangsspenning DC	216 V
Maks effekt.	3,2 W
Ytelse DS	3,2 W
Ytelse BS	1 W



dybde	54 mm
Bredde	277 mm
Høyde	184 mm
Vekt	0.81
Vekt inkludert emballasje	0.98
Tverrsnitt for tilkobling	2.5 mm ²
Koblingsinngang	Nei
Blokkering av nøddlys	Nei
Batteritilkobling	Nei
Dimmefunksjon	Ja
Lysstrømnettverk	220 lm
Lysstrøm nødsituasjon	220 lm
Tolltariffnummer	94056180
Opprinnelsesland	DEUTSCHLAND
EAN	4260349828567

TEKNISK TEGNING

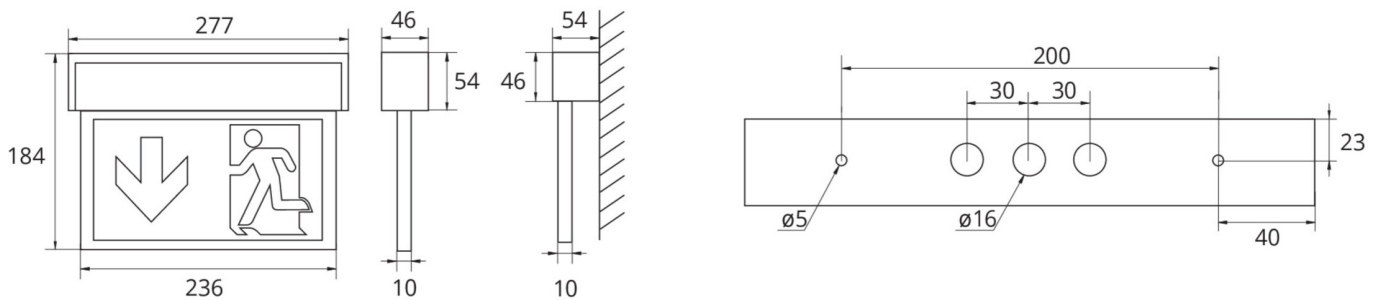

TILBEHØRSLISTE

DSA -
2PS-EB -



LIGNENDE PRODUKTER

Varenr.	Bilde	overvåkning	omsorg	Farge	investering	Automatisk inspeksjonsbok	Vedlikeholdsinnset	fjernvedlikehold	maks. lys	Individuell lysovervåking
ASMU019ML-WS		ML	Sentral strømforsyning		€€€	Ja	lav	Ja	1920 kroner per system	sentralt
ASMU519CC		CoreCompact 24	Sentral strømforsyning		€€	Ja	lav	Ja		sentralt

Fra: 27.06.2024 - Det tas forbehold om tekniske endringer og feil.