



Art.-Nr: AXR403SC-E

Exit sign

Recessed wall mounting, SelfControl, 3 h, 30 m, IP40, Zinc die-cast, Stainless steel

The AXR is a zinc-diecast exit sign for recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information




TECHNICAL DATA

| | |
|------------------------|---|
| Luminaire type | Exit sign |
| Mounting | Recessed wall mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE, ENEC |
| Insulation class | 2 |
| Monitoring | SelfControl |
| Bridging time | 3 h |
| Battery | LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Power max. | 4,2 W |
| Power DS | 3,4 W |
| Power BS | 0,9 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 80 mm |



| | |
|------------------------|---------------|
| Width | 312 mm |
| Height | 238 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 1.46 |
| Weight incl. packaging | 1.95 |
| Customs tariff number | 94056180 |
| EAN | 4260766555763 |

TECHNICAL DRAWING

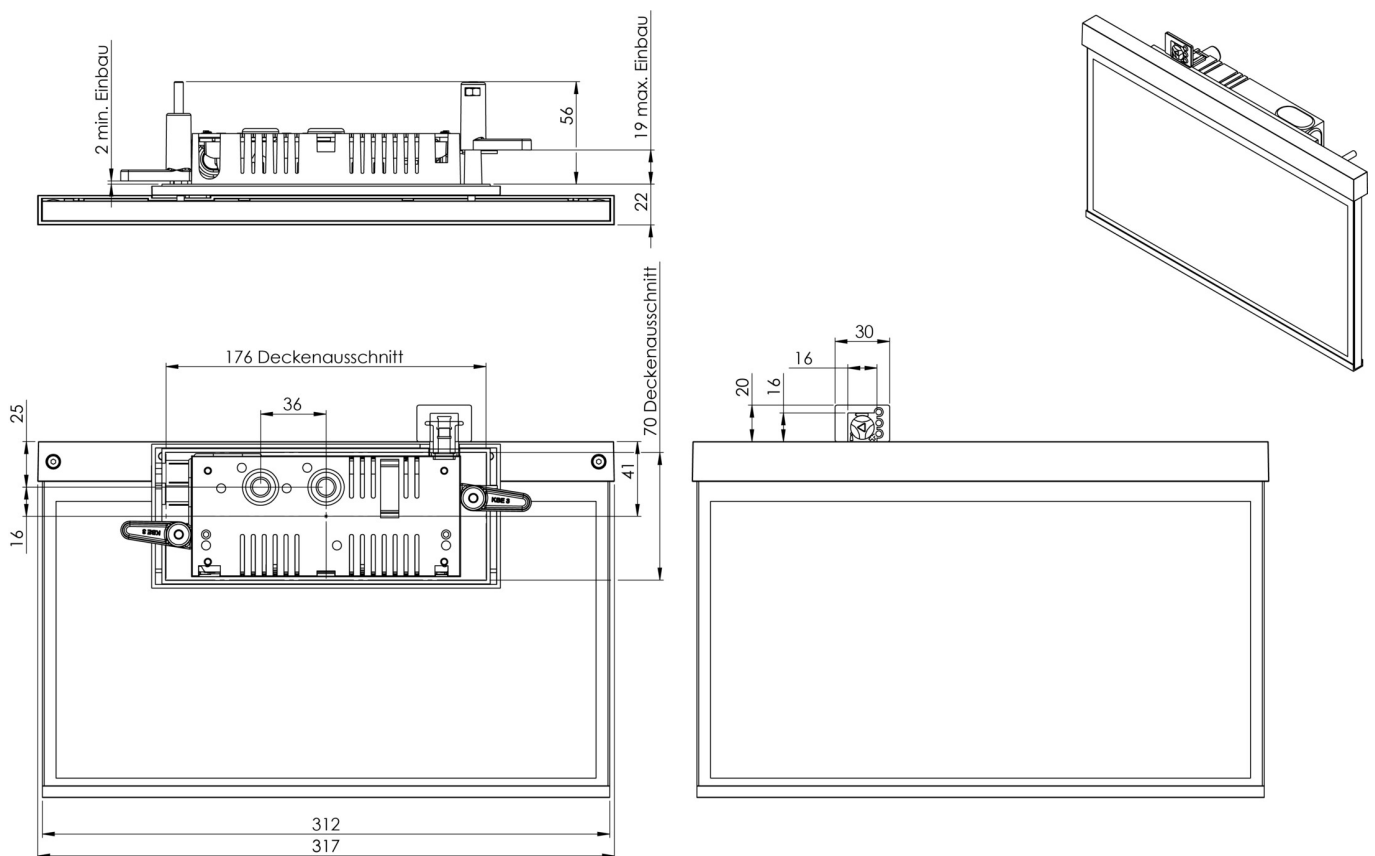

ACCESSORY LIST

BALLPLX-AX -

AM-XBE -

As of: 10.07.2024 - Subject to technical changes and errors.