



# RF GROUP

SOLUTIONS IN SAFETY + LIGHTING

[www.rf-group.com](http://www.rf-group.com)

## Art.-Nr: KAXU509CC

Cuboid polycarbonate luminaire design, discreetly reduced to the essentials. The design and universal installation is based on the KB luminaire, whereby the edge for holding the escape sign is permanently installed. The luminaires are equipped with modern LED lighting devices and offer flexibility through interchangeable pictograms.

LED escape sign luminaire according to DIN EN 60598-1, DIN EN 60598-2-22, DIN EN 7010 and DIN EN 1838.



More information




## Technical Data

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP64
Impact resistance (IK)	7
Certification	CE, WEEE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24
Bridging time	CPS
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V

Power max.	3,7 W
Power DS	3,7 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	326 mm
Width	50 mm
Height	248 mm
Weight	0.01
Weight incl. packaging	0.21
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	230 lm
Luminous flux emergency	230 lm
Customs tariff number	94056120
EAN	4260766551666

## Technical drawing

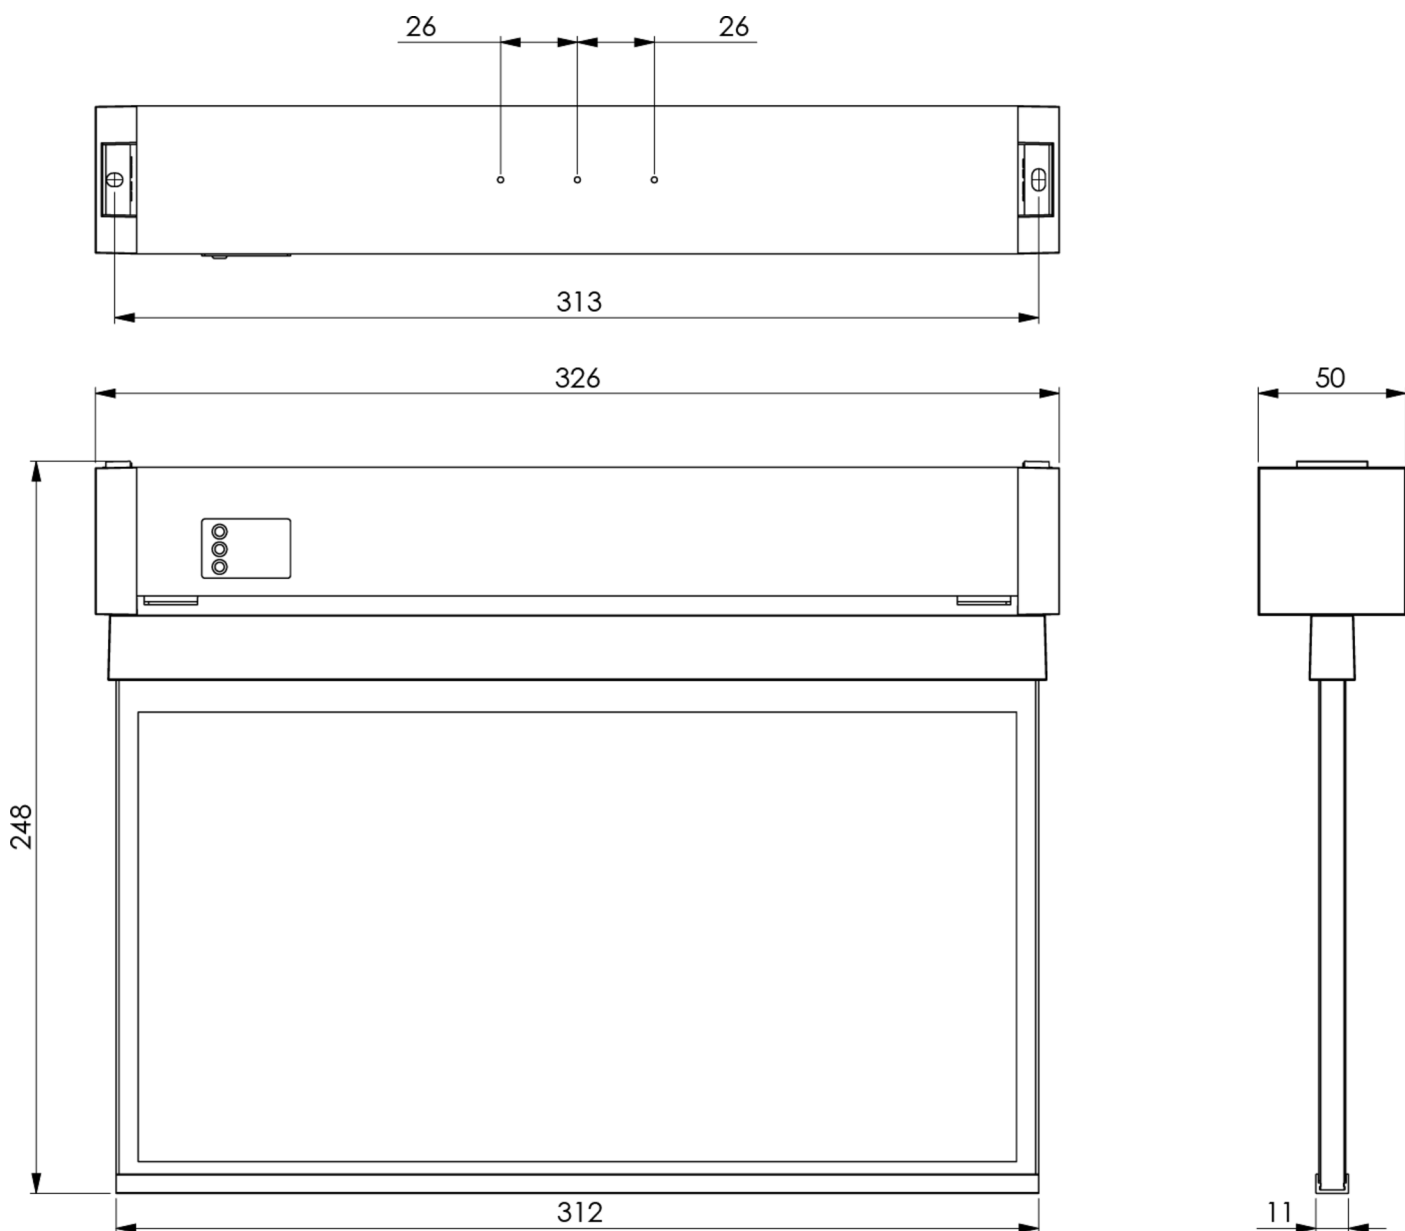

As of: 10.07.2024 - Subject to technical changes and errors.