



Art.-Nr: KDU019
Exit sign Centralised power supply systems
Universal, CPS, CPS, 22 m, IP43, Plastic, white

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



[More information](#)




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE, TÜV Rheinland Type approved, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CPS
Bridging time	CPS
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power DS	4,5 W
Power BS	0 W



Depth	70 mm
Width	260 mm
Height	155 mm
Weight	0.67
Weight incl. packaging	0.87
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	300 lm
Luminous flux emergency	300 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260123680879

TECHNICAL DRAWING

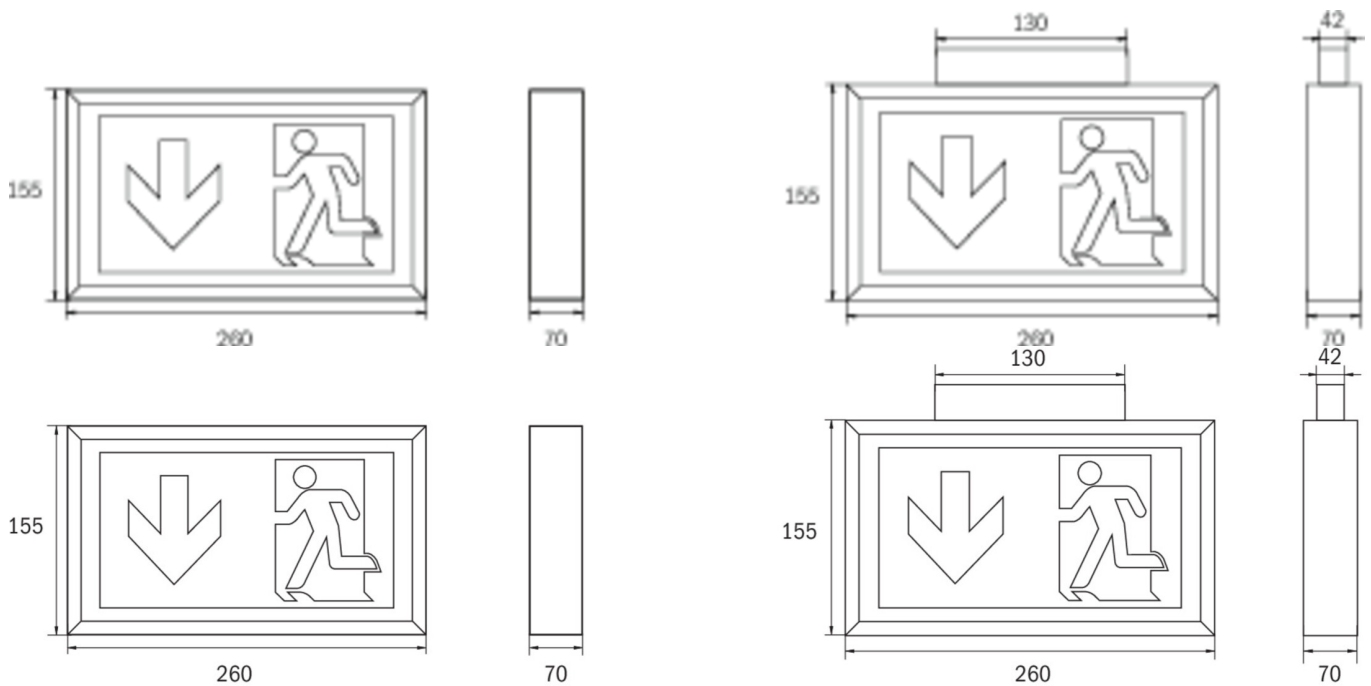



ACCESSORY LIST

DSA -
BALL1 -
2PW-EB -
2DW-EB -
BALLPLX-KD -

As of: 09.07.2024 - Subject to technical changes and errors.