



**Art.-Nr: KDU411SC**  
**Exit sign**  
**Universal, SelfControl, 1 h, 22 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.

Automatic monitoring of the emergency light with SelfControl.



More information

[www.rp-group.com/en/item/KDU411SC](http://www.rp-group.com/en/item/KDU411SC)




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Battery	6,4 V 1,6Ah Ah/
Power max.	4,3 W
Power DS	3,5 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	70 mm



Width	260 mm
Height	155 mm
Weight	0.73
Weight incl. packaging	0.93
Customs tariff number	94056120
EAN	4260766553417

## TECHNICAL DRAWING

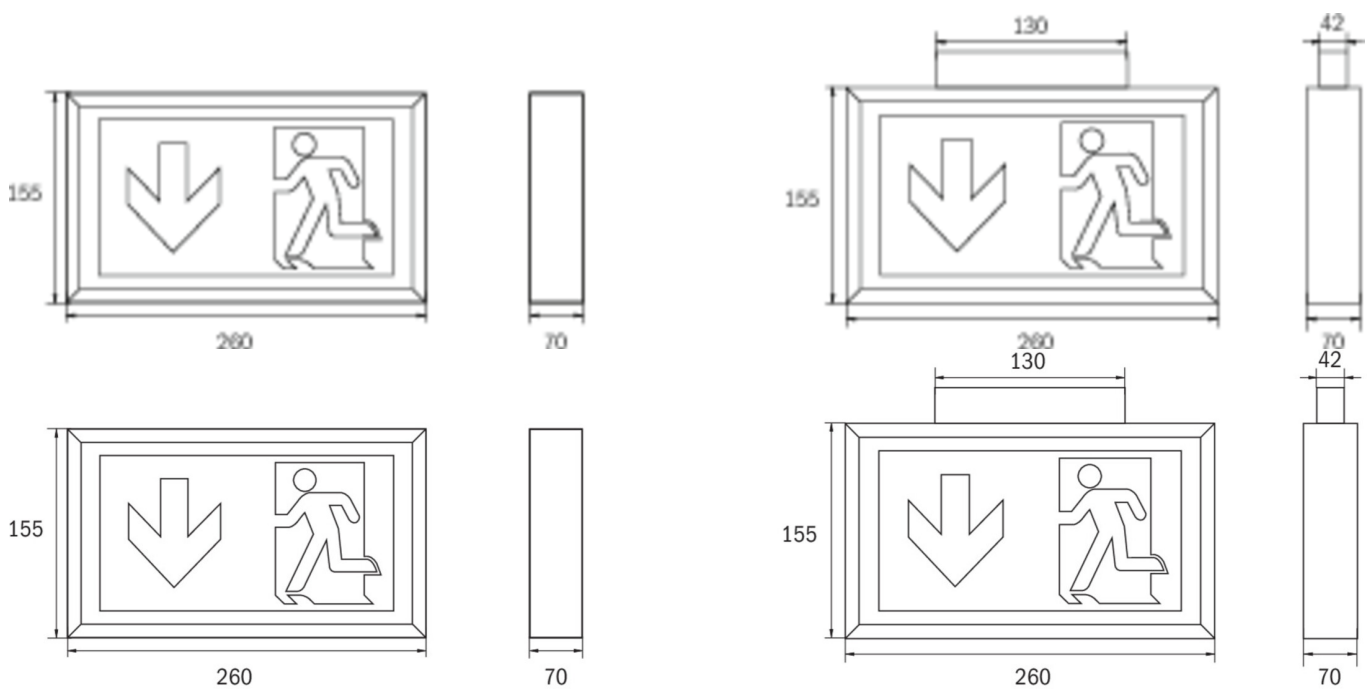

## ACCESSORY LIST

- DSA -
- BALL1 -
- 2PW-EB -
- 2DW-EB -
- BALLPLX-KD -

As of: 04.09.2024 - Subject to technical changes and errors.