



**Art.-Nr: KDU411WL**  
**Exit sign Single Battery**  
**Universal, Wireless Professional, 1 h, 22 m, IP43, Plastic, white**

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




## TECHNICAL DATA

|                        |   |
|------------------------|---|
| Luminaire type         | Exit sign   |
| Mounting               | Universal   |
| Recognition distance   | 22 m  |
| Pictograph             | Set   |
| Illuminant             | LED   |
| Housing material       | Plastic   |
| Housing color          | white   |
| Protection type (IP)   | IP43  |
| Impact resistance (IK) | 3   |
| Certification          | WEEE, CE  |
| Insulation class       | 2   |
| Supply                 | Single Battery  |
| Monitoring             | Wireless Professional   |
| Bridging time          | 1 h   |
| Battery                | LiFePO4 - 2 pcs - 3,2 V /1200mAh LiFePO4 - Lithium Iron Phosphate Battery |
| Operating mode         | Standby circuit / permanent circuit                                       |
| Input voltageAC        | 230 V   |
| Input frequency        | 50 Hz   |
| Power max.             | 4,7 W   |
| Power DS               | 3,5 W   |



|                          |                     |
|--------------------------|---------------------|
| Power BS                 | 0,8 W               |
| Depth                    | 70 mm               |
| Width                    | 260 mm              |
| Height                   | 155 mm              |
| Weight                   | 0.85                |
| Weight incl. packaging   | 1.05                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | Yes                 |
| Battery connection       | Connector           |
| Dimming function         | Yes                 |
| Customs tariff number    | 94056120            |
| Country of origin        | DEUTSCHLAND         |
| EAN                      | 4262483020852       |

## TECHNICAL DRAWING

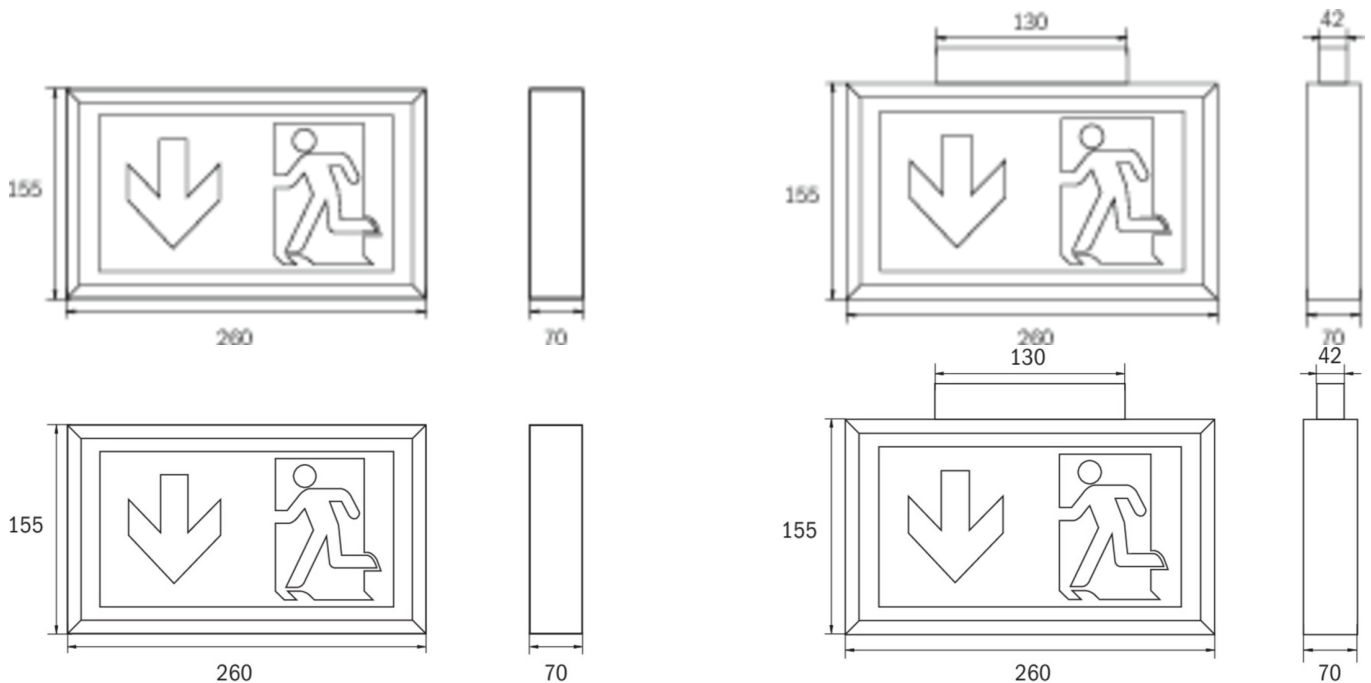



## ACCESSORY LIST

DSA -  
BALL1 -  
2PW-EB -  
2DW-EB -  
BALLPLX-KD -

As of: 08.07.2024 - Subject to technical changes and errors.