



Art.-Nr: KDU519CC
Exit sign Central power supply
Universal, CoreCompact 24, Central power supply, 22 m,
IP43, Plastic, white

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or eventual at wall bracket through supplied adapter). This luminaire provides additional downward lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. Improved reliability through being easy to install and the universal use of pictograms. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	Waste disposal, CE
Insulation class	3
Supply	Central power supply
Monitoring	CoreCompact 24
Bridging time	Central power supply
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	2,6 W
Power DS	2,6 W
Power BS	0,4 W
Depth	70 mm
Width	260 mm



Height	155 mm
Weight	0.63
Weight incl. packaging	0.83
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	165 lm
Luminous flux emergency	165 lm
Customs tariff number	94056120
Country of origin	DEUTSCHLAND
EAN	4260682157379

TECHNICAL DRAWING

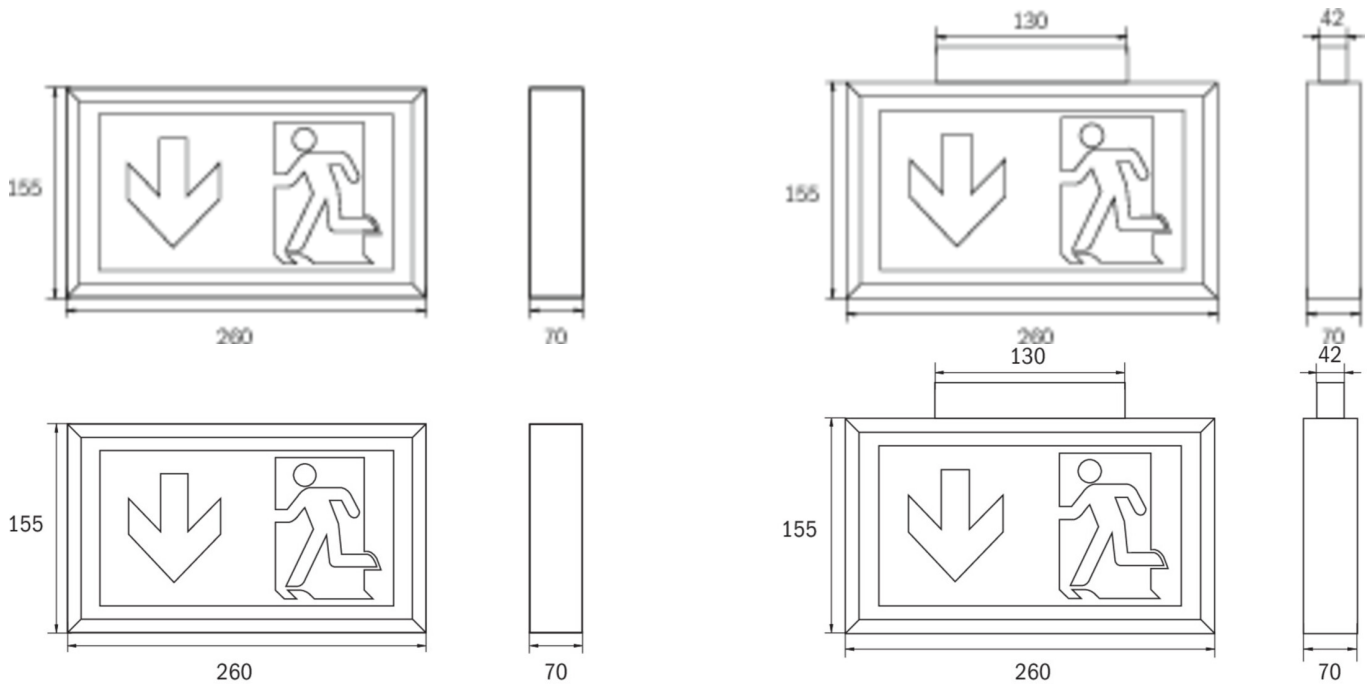



ACCESSORY LIST

DSA -
BALL1 -
2PW-EB -
2DW-EB -
BALLPLX-KD -

RELATED PRODUCTS

Art-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KDU019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 28.06.2024 - Subject to technical changes and errors.