



**Art.-Nr: KEU411SC**  
**Safety luminaire Supply**  
**Universal, SelfControl, 1 h, , IP40, Plastic, white**

Compact polycarbonate luminaire with ERT-LED for universal mounting and for the lighting of escape and rescue routes according to DIN EN 605981, DIN EN 60598-2-22 and EN 1838. Available for central power systems or as a self-contained luminaire. Also available as ERT luminaire with improved illumination. Plastic, white, IP40 Universal mounting (incl.: wall (W), ceiling (D), wall bracket)



More information




## TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Power max.	5,5 W
Power DS	4,6 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	332 mm
Width	48 mm
Height	72 mm
Weight	0.46
Weight incl. packaging	0.5



Luminous flux mains	320 lm
Luminous flux emergency	320 lm
Customs tariff number	94056120
EAN	4260766557453

## TECHNICAL DRAWING

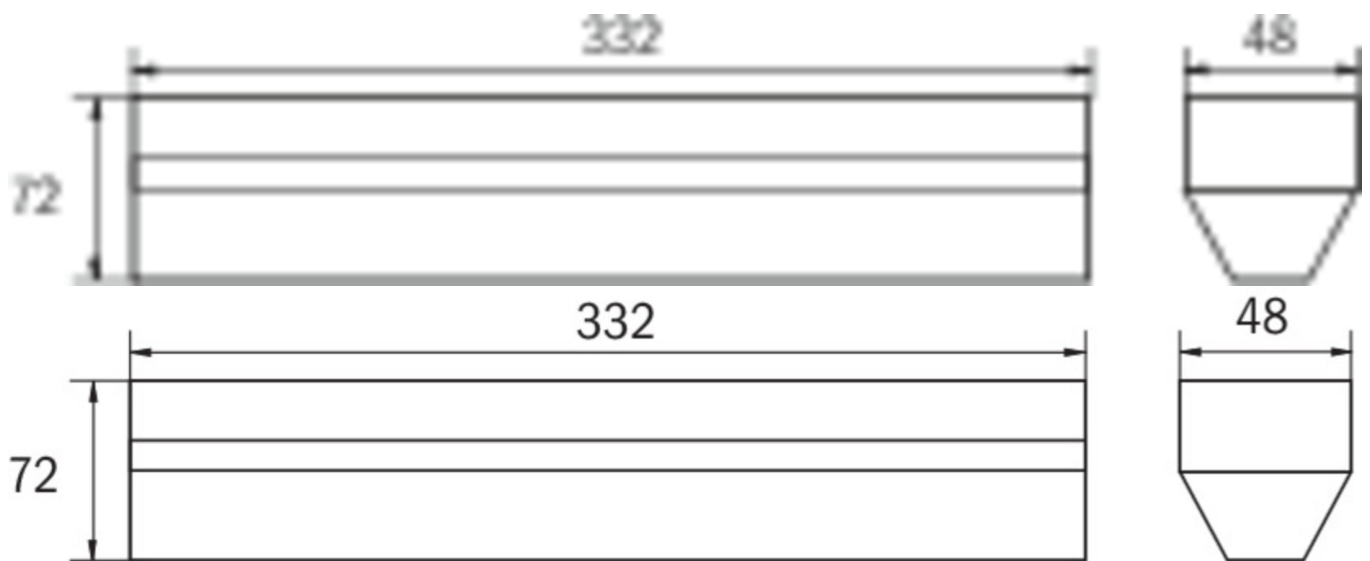

## ACCESSORY LIST

- DSA -
- KEE-EB -
- 2PW-EB -
- 2DW-EB -
- KXBE -

As of: 10.07.2024 - Subject to technical changes and errors.