



Art.-Nr: KMB411WB-3P
Safety luminaire Single Battery
Universal, Wireless Basic, 1 h, , IP54, Plastic, white

Compact emergency luminaire for the illumination of escape and rescue routes with prismatic cover for optimized light distribution. This is made possible by the with the High-Power SMD LEDs which also have a really long life span of around 50000 h. These luminaires are available for central battery systems or as a self-contained luminaire. The optional recessed mounting frame hides the luminaire elegantly within the ceiling.



More information




TECHNICAL DATA

| | |
|------------------------|-------------------------------------|
| Luminaire type | Safety luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | Wireless Basic |
| Bridging time | 1 h |
| Operating mode | Standby circuit / permanent circuit |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power DS | 3,9 W |
| Power BS | 1,5 W |
| Depth | 250 mm |



| | |
|--------------------------|---------------------|
| Width | 34 mm |
| Height | 50 mm |
| Weight | 0.5 |
| Weight incl. packaging | 0.57 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056180 |
| Country of origin | DEUTSCHLAND |
| EAN | 4262483020371 |

TECHNICAL DRAWING

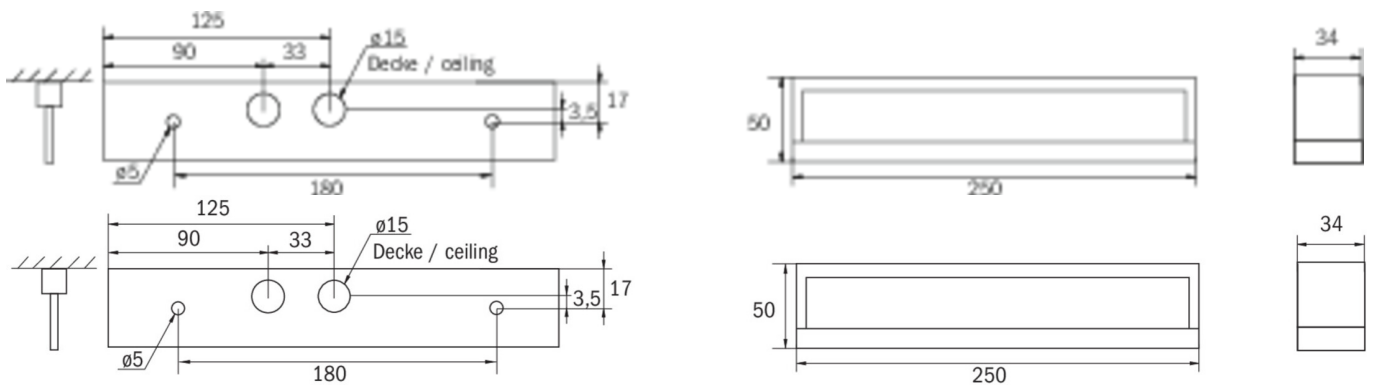

ACCESSORY LIST

- KME-EB -
- BALL1 -
- KMBE -
- BALLPLX-KMB -
- KMBFH -

As of: 29.06.2024 - Subject to technical changes and errors.