



**Art.-Nr: KMU011WL-SW**  
**Exit sign Single Battery**  
**Universal, Wireless Professional, 1 h, 24 m, IP43, Plastic,**  
**Black**

Slim convex polycarbonate luminaire for universal mounting and for the marking of escape and rescue routes acc. to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838 for single or double sided labeling. LED technology white High-Power SMD LED.

Housing color in black RAL 9005

Wireless centralised control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

[www.rp-group.com/en/item/KMU011WL-SW](http://www.rp-group.com/en/item/KMU011WL-SW)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	Black
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	1 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V



Power max.	5,3 W
Power DS	3,9 W
Power BS	1,5 W
Ambient temperature DS	-5 °C - 50 °C
Ambient temperature BS	-5 °C - 35 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.45
Weight incl. packaging	0.55
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260682151643



## TECHNICAL DRAWING

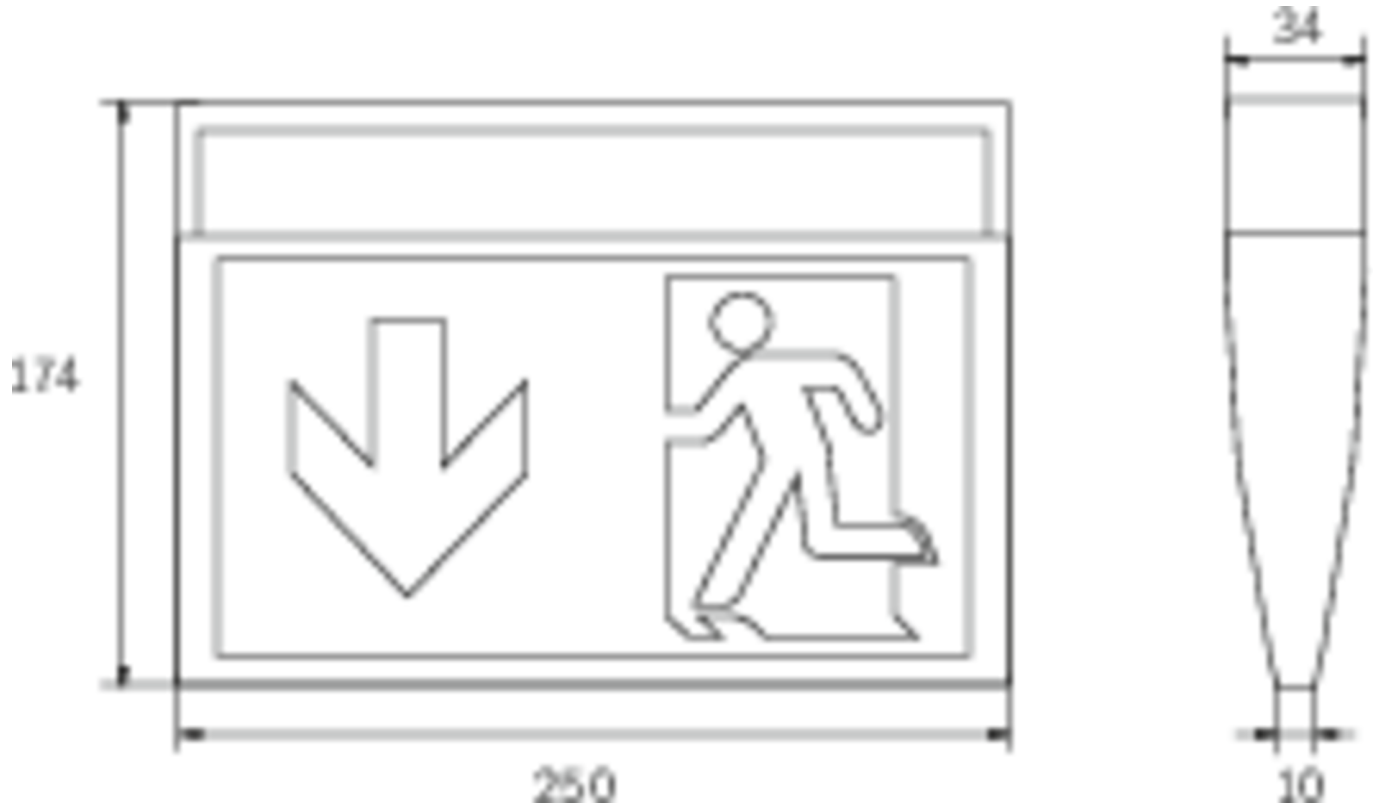

## ACCESSORY LIST

- DSA -
- KME-EB -
- AWKSU -
- 2PW-EB -
- KMBE -
- BALLPLX-KMU -

As of: 20.08.2024 - Subject to technical changes and errors.