



Art.-Nr: KMU013SC
Exit sign Single Battery
Universal, SelfControl, 3 h, 24 m, IP43, Plastic, white

Automatic monitoring of the emergency light with SelfControl.



More information

www.rp-group.com/en/item/KMU013SC



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE, ENEC
Insulation class	2
Supply	Single Battery
Monitoring	SelfControl
Bridging time	3 h
Battery	3,2V V 3,3Ah Ah/
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	4,6 W
Power DS	3,3 W
Power BS	1 W



Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.45
Weight incl. packaging	0.55
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4260123690212



TECHNICAL DRAWING

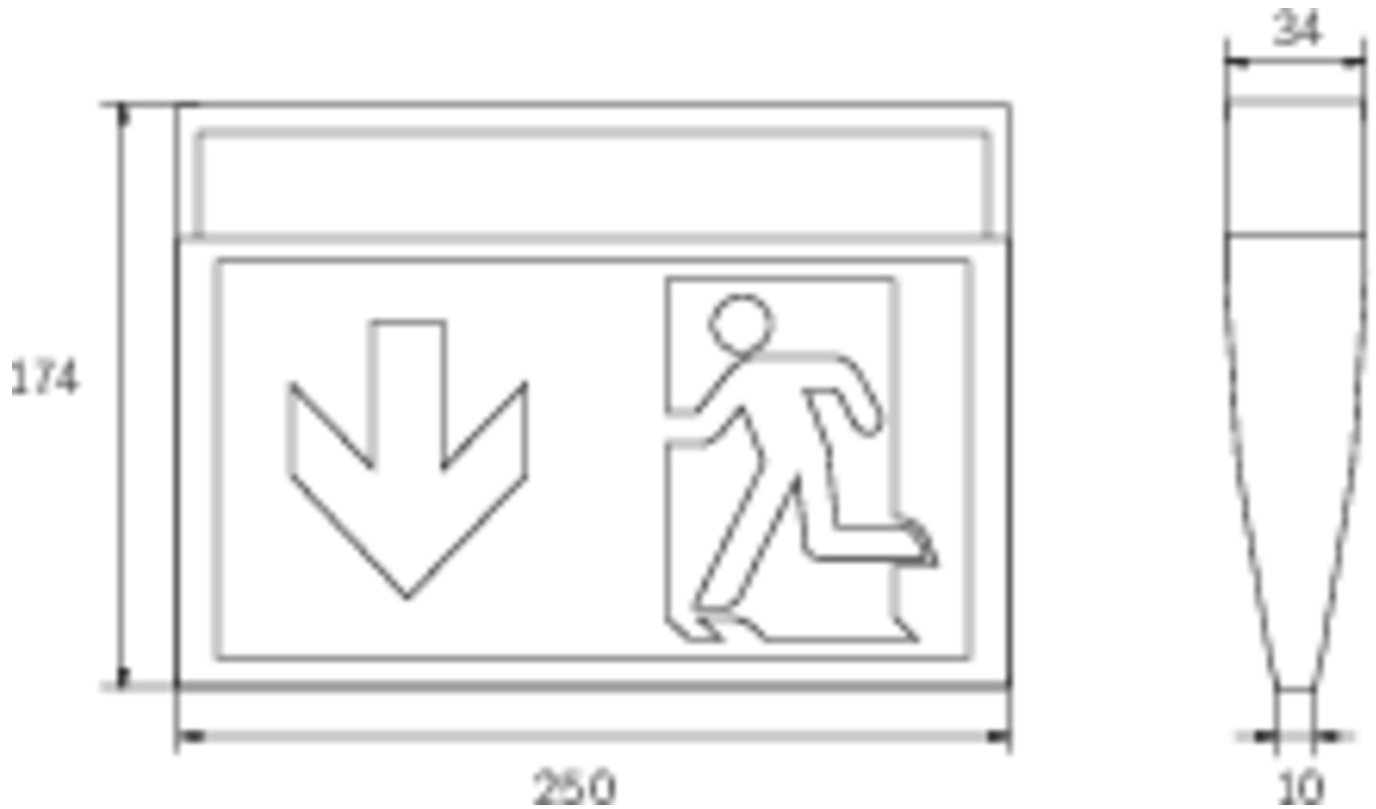

ACCESSORY LIST

- DSA -
- KME-EB -
- AWKSU -
- 2PW-EB -
- KMBE -
- BALLPLX-KMU -



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMU003SC		SelfControl	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU013WB		Wireless Basic	Single battery	RAL 9003	€€	yes	low	yes	50	central
KMU013WL		Wireless Professional	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central

As of: 20.08.2024 - Subject to technical changes and errors.