



Art.-Nr: KWID411SC
Exit sign Supply
Ceiling, SelfControl, 1 h, 16 m, IP65, Plastic, white

Classic bar-shaped polycarbonate luminaire for ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

Pictograms according to DIN EN ISO 7010 and DIN ISO 3864 (left, right, above, below) are included as standard in the scope of delivery.



More information




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Ceiling
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	SelfControl
Bridging time	1 h
Power max.	5,5 W
Power DS	4,6 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	93 mm
Width	390 mm
Height	139 mm
Weight	0.87



Weight incl. packaging	0.97
Luminous flux mains	320 lm
Luminous flux emergency	320 lm
Customs tariff number	94056120
EAN	4260766553431

TECHNICAL DRAWING

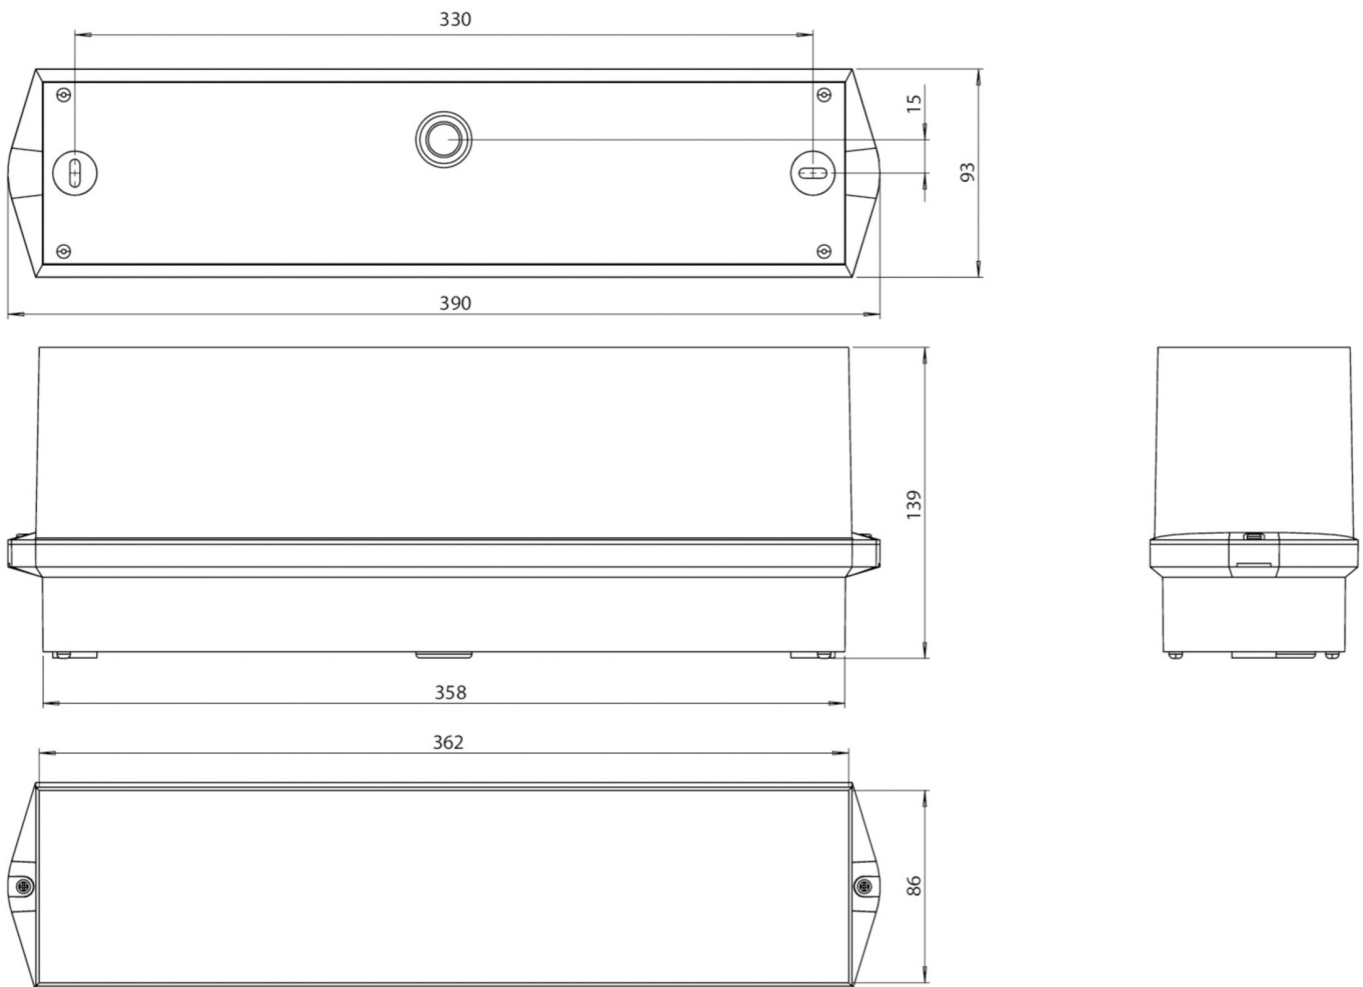

ACCESSORY LIST

BKW -

As of: 10.07.2024 - Subject to technical changes and errors.