



**Art.-Nr: QAW423WL-BM-SIWW**  
**Generelt lys, Sikkerhetslys Enkelt batteri**  
**Universell, Trådløs profesjonell, 3 timer, , IP20, aluminium, hvit**

Round metal luminaire for general lighting and the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. The LED-luminaire is operated with 26W, 2.300lm and light colour 3000 Kelvin. The general light is switched independently of the emergency light via the motion detector, which is not visible from the outside.



Mer informasjon




## TEKNISKE DATA

|                     |   |
|---------------------|---|
| Type armatur        | Generelt lys, Sikkerhetslys                                     |
| Monteringstype      | Universell  |
| piktogram           | Nei   |
| Lyspærer            | LED   |
| Koffertmateriale    | aluminium   |
| Farge på huset      | hvit  |
| IP-beskyttelse)     | IP20  |
| Slagstyrke (IK)     | ≥ 3   |
| Sertifisering       | Sjøppeltømming, CE  |
| beskyttelses klasse | 1   |
| omsorg              | Enkelt batteri  |
| overvåkning         | Wireless Professional   |
| Brotid              | 3 timer   |
| Batteri             | LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery |
| Driftsmodus         | Standby kobling / permanent kobling                             |
| Inngangsspenning AC | 230 V   |
| Inngangsfrekvens    | 50/60 Hz  |
| Maks effekt.        | 30 W  |
| Ytelse DS           | 26,4 W  |
| Ytelse BS           | 0,4 W   |
| Høyde               | 113 mm  |



|                           |                     |
|---------------------------|---------------------|
| diameter                  | 395 mm              |
| Vekt                      | 0.78                |
| Vekt inkludert emballasje | 1.1                 |
| Tverrsnitt for tilkobling | 2.5 mm <sup>2</sup> |
| Koblingsinngang           | Ja                  |
| Blokkering av nødlys      | Nei                 |
| Batteritilkobling         | Støpsel             |
| Dimmefunksjon             | Ja                  |
| Lysstrømnettverk          | 2300 lm             |
| Lysstrøm nødsituasjon     | 250 lm              |
| Tolltariffnummer          | 94056180            |
| Opprinnelsesland          | DEUTSCHLAND         |
| EAN                       | 4260682159908       |

## TEKNISK TEGNING

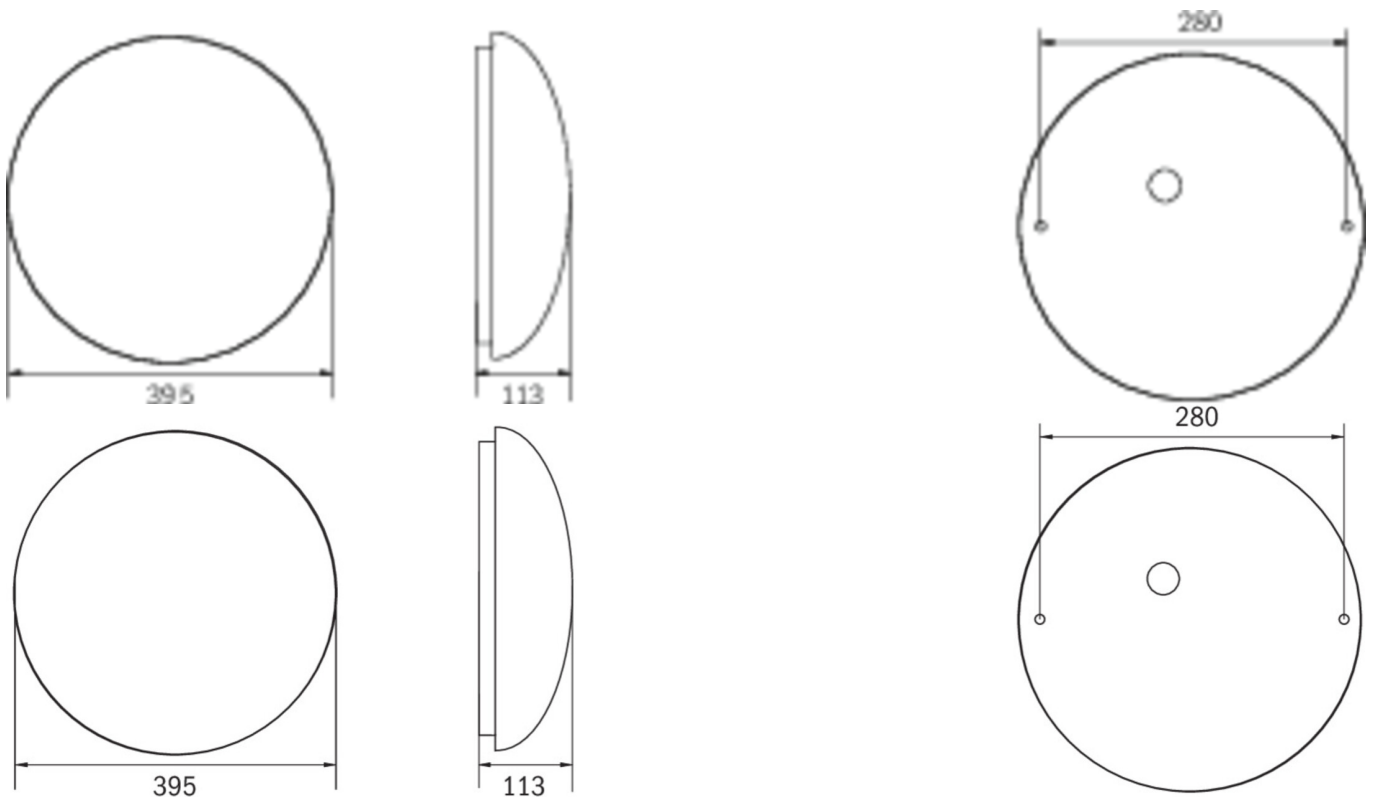

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.