



**Art.-Nr: WER029ML-AZ**

### **(ERT) Emergency route lighting**

LED emergency luminaire for wall installation and for the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 605982-22 and DIN EN 1838. This recessed luminaire is designed for installation in conventional jacks. The mounting frame can be aligned with the jack. The zinc-aluminum cover is locked without externally visible fastening. Through the status LED which is incorporated in the lens the harmony of the housing is not interrupted.



Mer informasjon



#### TEKNISKE DATA





|                     |                         |
|---------------------|-------------------------|
| Type armatur        | Sikkerhetslys           |
| Monteringstype      | Veggmontering           |
| piktogram           | Nei                     |
| Lyspærer            | LED                     |
| Koffertmateriale    | Sinkstøping             |
| Farge på huset      | antrasitt               |
| IP-beskyttelse)     | IP20                    |
| Slagstyrke (IK)     | ≥ 3                     |
| Sertifisering       | Søppeltømming, CE       |
| beskyttelses klasse | 2                       |
| omsorg              | sentral strømforsyning  |
| overvåkning         | ML                      |
| Brotid              | sentral strømforsyning  |
| Driftsmodus         | Individuell lysveksling |
| Inngangsspenning AC | 230 V                   |
| Inngangsfrekvens    | 50/60 Hz                |
| Inngangsspenning DC | 216 V                   |
| Maks effekt.        | 2,1 W                   |



|                           |                     |
|---------------------------|---------------------|
| Ytelse DS                 | 2,1 W               |
| Ytelse BS                 | 0,7 W               |
| dybde                     | 20 mm               |
| Bredde                    | 90 mm               |
| Høyde                     | 90 mm               |
| Installasjonsdiameter     | 68 mm               |
| Vekt                      | 0.3                 |
| Vekt inkludert emballasje | 0.33                |
| Tverrsnitt for tilkobling | 2.5 mm <sup>2</sup> |
| Koblingsinngang           | Nei                 |
| Blokkering av nødlys      | Nei                 |
| Batteritilkobling         | Nei                 |
| Dimmefunksjon             | Nei                 |
| Lysstrømnettverk          | 140 lm              |
| Lysstrøm nødsituasjon     | 140 lm              |
| Tolltariffnummer          | 94056180            |
| Opprinnelsesland          | DEUTSCHLAND         |
| EAN                       | 4260659564100       |



TEKNISK TEGNING

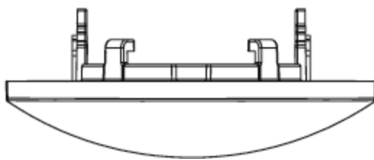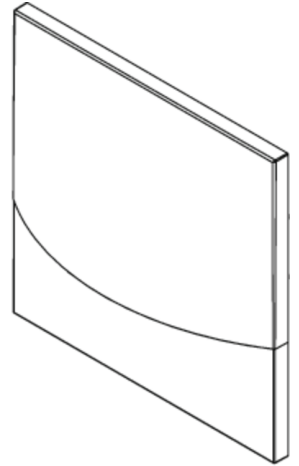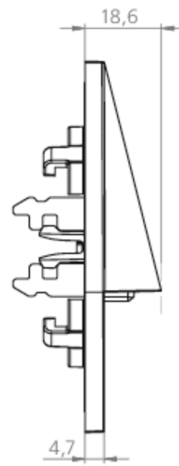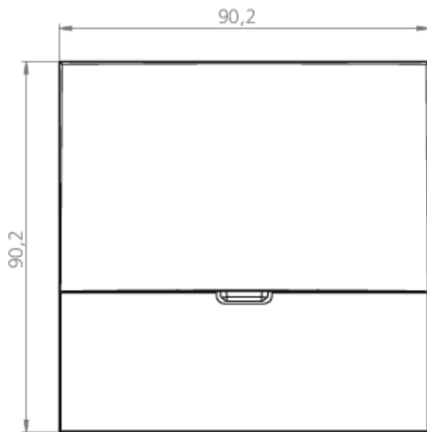

Fra: 29.06.2024 - Det tas forbehold om tekniske endringer og feil.