



**Art.-Nr: XGMU001SC-BS**  
**Safety luminaire Single Battery**  
**Universal, SelfControl, 1 h, , IP66, Aluminum die-cast, Glass,**  
**Housing color**

Explosion-proof LED glass cylinder Safety light for gas and dust Ex zones.  
Available in three sizes with a luminous flux of up to 5000lm.

Prepared for two cable entries for through-wiring. By applying a pictogram can also be used as a exit sign.

Mounting options Wall or ceiling mounting with adapter or suspension with chain eye.

According to 2014/34/EG (ATEX)

Zone 1 / Zone 21 gas and dust

- Ex d IIB T6 Gb / Ex d IIB T6 Gb
- Ex t IIIC T85°C Db

Buidt according to:

-EN 60079-0:2018, EN 60079-1:2014, EN 60079-31:2014

-Certified by INERIS 20ATEX0005X



More information



## TECHNICAL DATA





Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminum die-cast, Glass
Protection type (IP)	IP66
Impact resistance (IK)	7
Certification	Waste disposal, CE
Insulation class	1
Supply	Single Battery
Monitoring	SelfControl
Bridging time	1 h
Operating mode	Standby circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Power max.	5,8 W
Power BS	3,5 W
Depth	750 mm
Width	157 mm
Height	197 mm
Weight	5.5
Weight incl. packaging	6.4
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	Yes
Battery connection	Clip
Dimming function	No
Luminous flux mains	0 lm
Luminous flux emergency	700 lm
Customs tariff number	94051190
Country of origin	SPANIEN
EAN	4260659564339



## TECHNICAL DRAWING

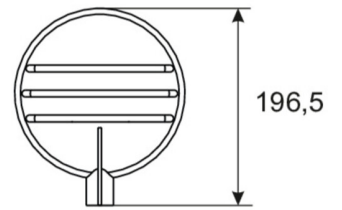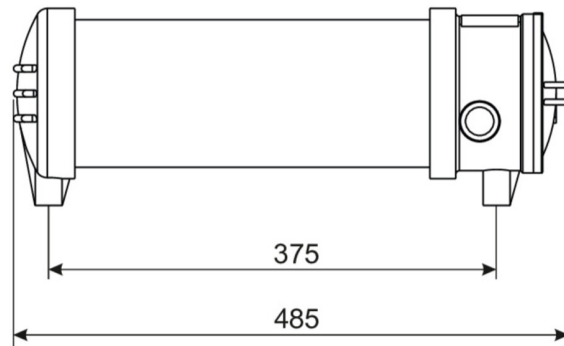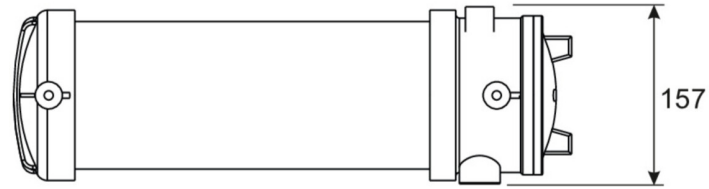

## ACCESSORY LIST

- X-K0001 -
- X-MB001 -
- X-KE001 -
- X4N -

As of: 29.06.2024 - Subject to technical changes and errors.