




Art.-Nr: UEMR019ML

Frameless and wall-flush LED exit sign light for wall recessed installation. A lamp that is optimally integrated into the wall, with no frame, screws or protruding parts influencing the design of the surrounding area.

A clever leveling system is already integrated and makes it easy to align the lamp exactly to the level of the wall.

The pictogram set is inserted inside and attached without using solvents.

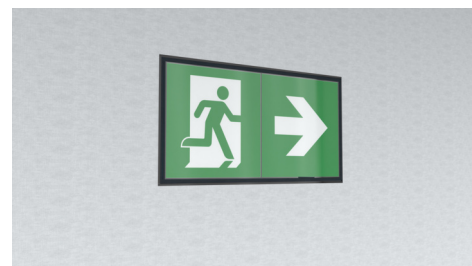

More information




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Certification	CE, WEEE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	ML
Bridging time	CPS
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,7 W
Power DS	3,7 W
Power BS	1,1 W
Weight	0.19
Weight incl. packaging	0.44
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No



Battery connection	No
Dimming function	Yes
Luminous flux mains	120 lm
Luminous flux emergency	120 lm
EAN	4260766550072

TECHNICAL DRAWING

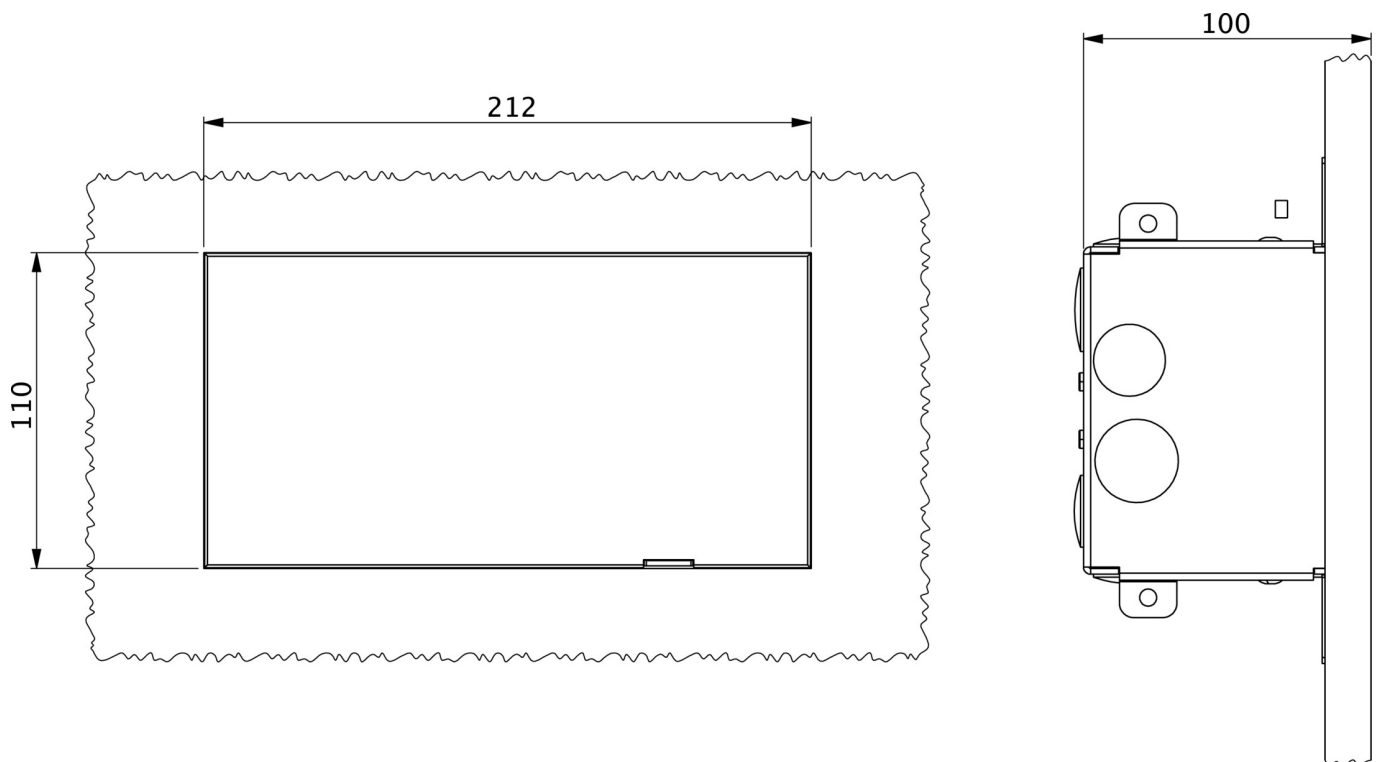

As of: 11.07.2024 - Subject to technical changes and errors.