



SOLUTIONS IN SAFETY + LIGHTING

www.rp-group.com

Art.-Nr: WGW019ML

Exit sign Centralised power supply systems

Wall mounting, CPS, 46 m, IP20, Metal, White,

Square emergency exit sign cube luminaire for wall mounting for illuminating escape and emergency routes.

The cube shape means that this plastic luminaire is easily recognisable from three sides. Ideal for large-scale applications, e.g. in large stores.

Control and monitoring via [central power supply system](#).



More information

www.rp-group.com/en/item/WGW019ML




Technical Data


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	46 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE

Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230V
Input frequency	50 / 60 Hz
Input voltage DC	216V
Power max.	5,4W
Power maintained	5,4W
Power non-maintained	1,1W
Ambient temperature maintained mode	-20°C to 40°C
Ambient temperature non-maintained mode	-20°C to 40°C
Depth	237mm
Width	237mm
Height	237mm
Weight	1.18
Weight incl. packaging	1.32
Connection cross-section	2.5mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	470lm
Luminous flux emergency	470lm
Customs tariff number	94056120
GTIN	4260659564179


Technical drawing

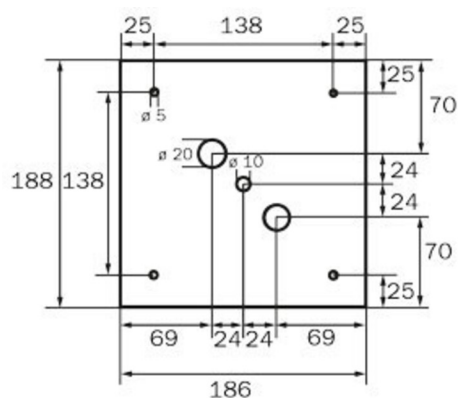




WG

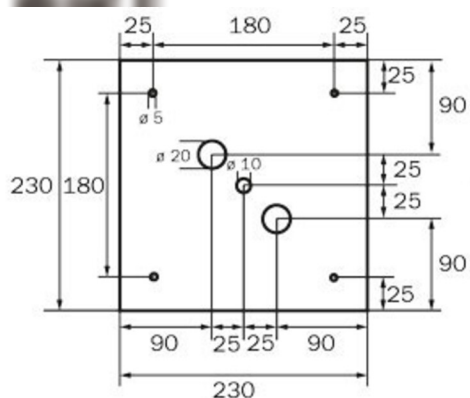

WK

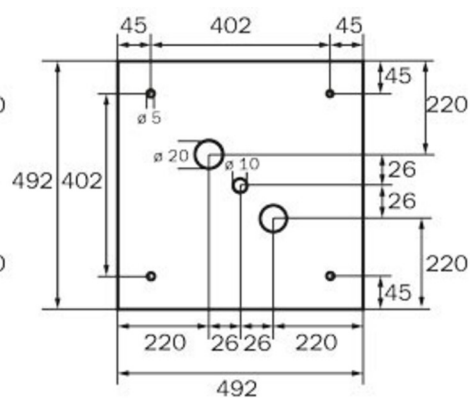


WX

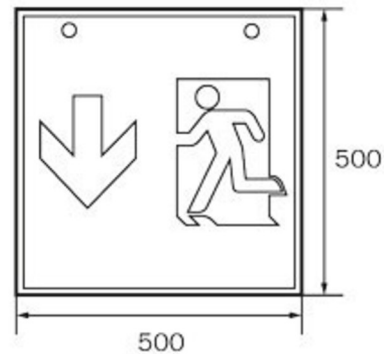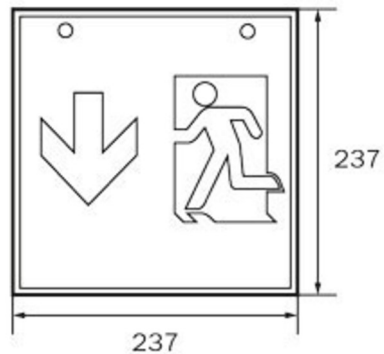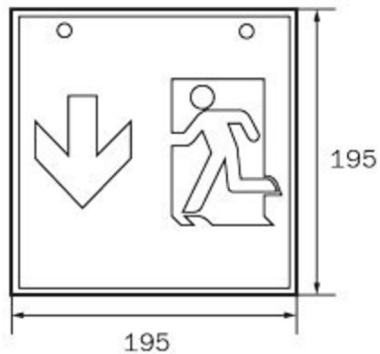

WG

WK

WX

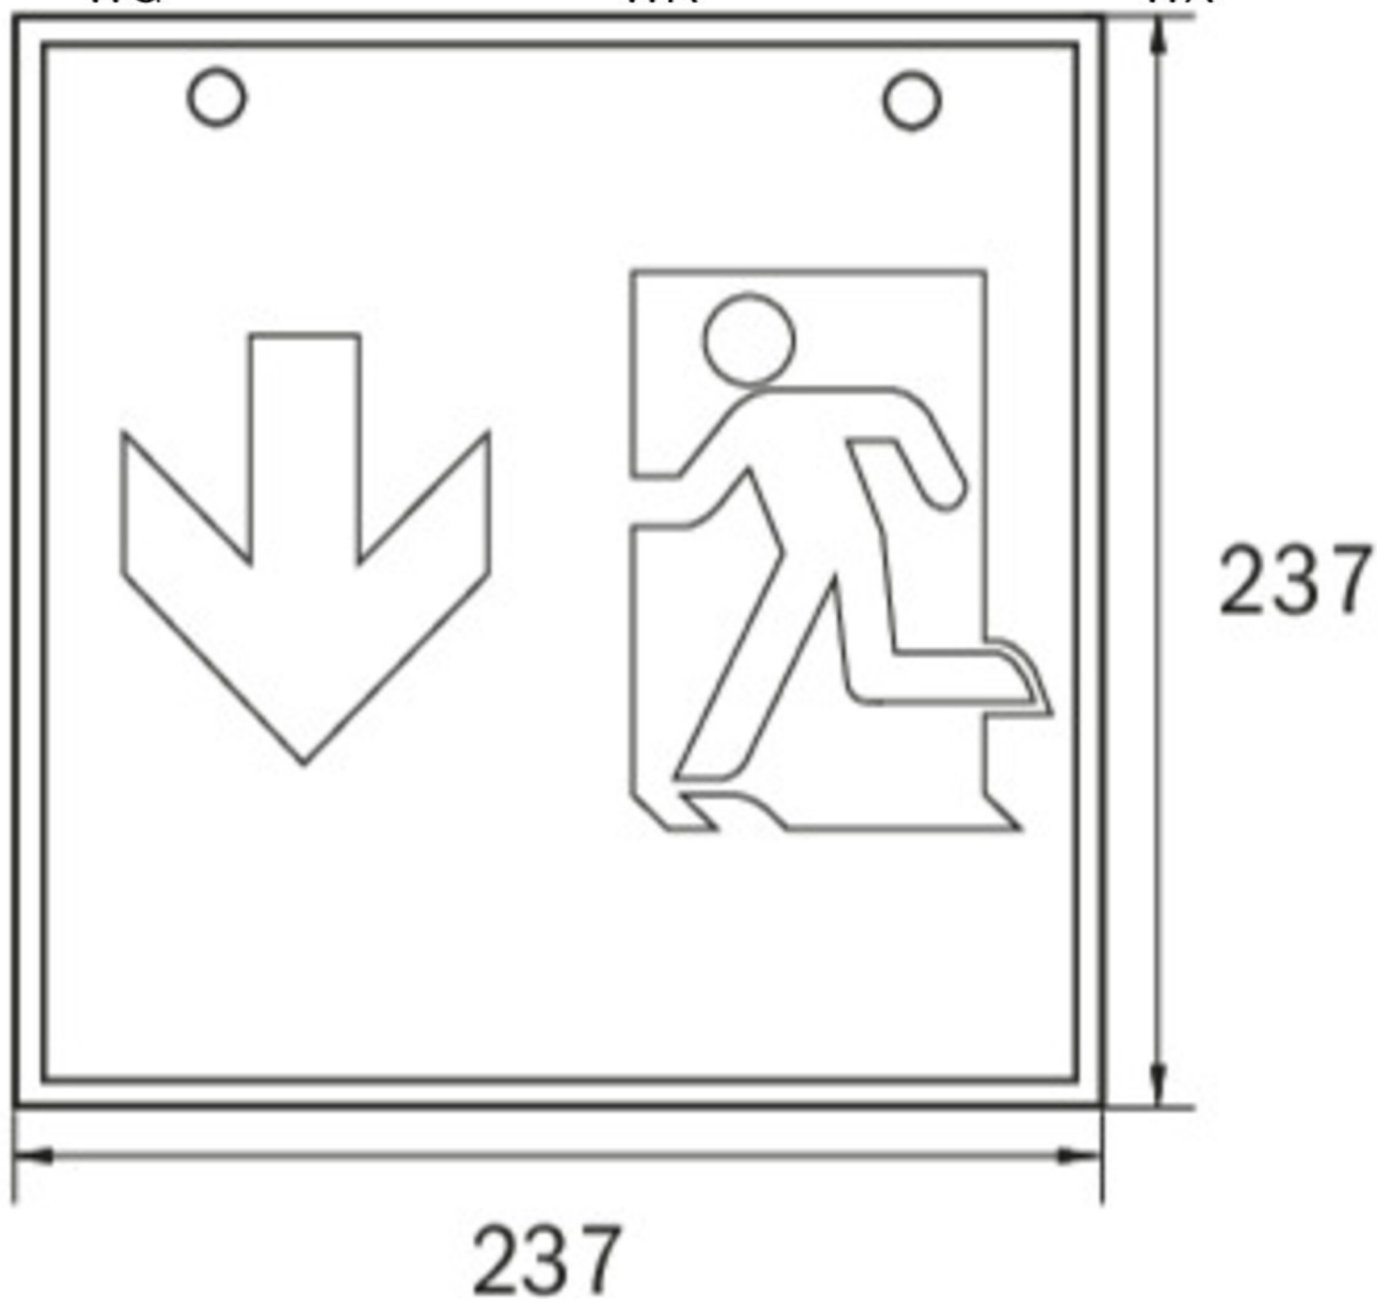

Accessory List

WKO - Set of chain eyelets for cube mounting (4 pieces)
As of: 23.06.2026 - Subject to technical changes and errors.